

# CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering  
UCSC Baskin Engineering

Lecture 8

- ❑ A lot of students have been having difficulty seeing the HTTP packets generated when navigating to "http://www.soe.ucsc.edu" in Chromium. I believe this is due to caching in the web browser.
- ❑ As a fix, use "wget" to navigate to http://www.soe.ucsc.edu" instead of Chromium, and you should see the intended results.

# Clarify

- How to call a “packet” in different layers
  - ❖ Application layer: message
  - ❖ Transport layer: segment
  - ❖ Network layer: datagram
  - ❖ Data link layer: frame
  
- They are used for precise presentation.
  - ❖ You are not required to be that precise in exams.

# Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

# rdt2.0: channel with bit errors


- ❖ underlying channel may flip bits in packet
  - checksum to detect bit errors
- ❖ *the question*: how to recover from errors:

*How do humans recover from “errors”  
during conversation?*

# rdt2.0: channel with bit errors


- ❖ underlying channel may flip bits in packet
  - checksum to detect bit errors
- ❖ *the question: how to recover from errors:*
  - *acknowledgements (ACKs)*: receiver explicitly tells sender that pkt received OK
  - *negative acknowledgements (NAKs)*: receiver explicitly tells sender that pkt had errors
  - sender retransmits pkt on receipt of NAK
- ❖ new mechanisms in `rdt2.0` (beyond `rdt1.0`):
  - error detection
  - feedback: control msgs (ACK,NAK) from receiver to sender

# rdt2.0: FSM specification

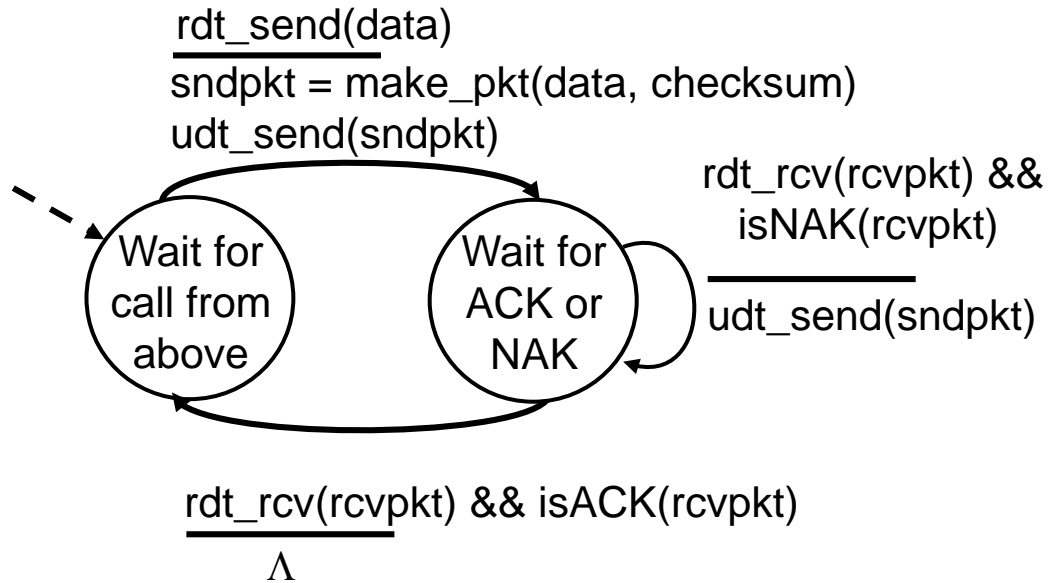


sender

receiver

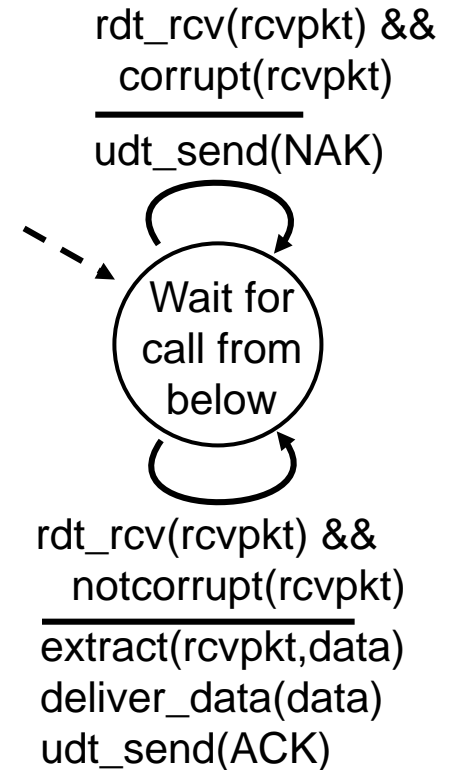


# rdt2.0: operation with no errors

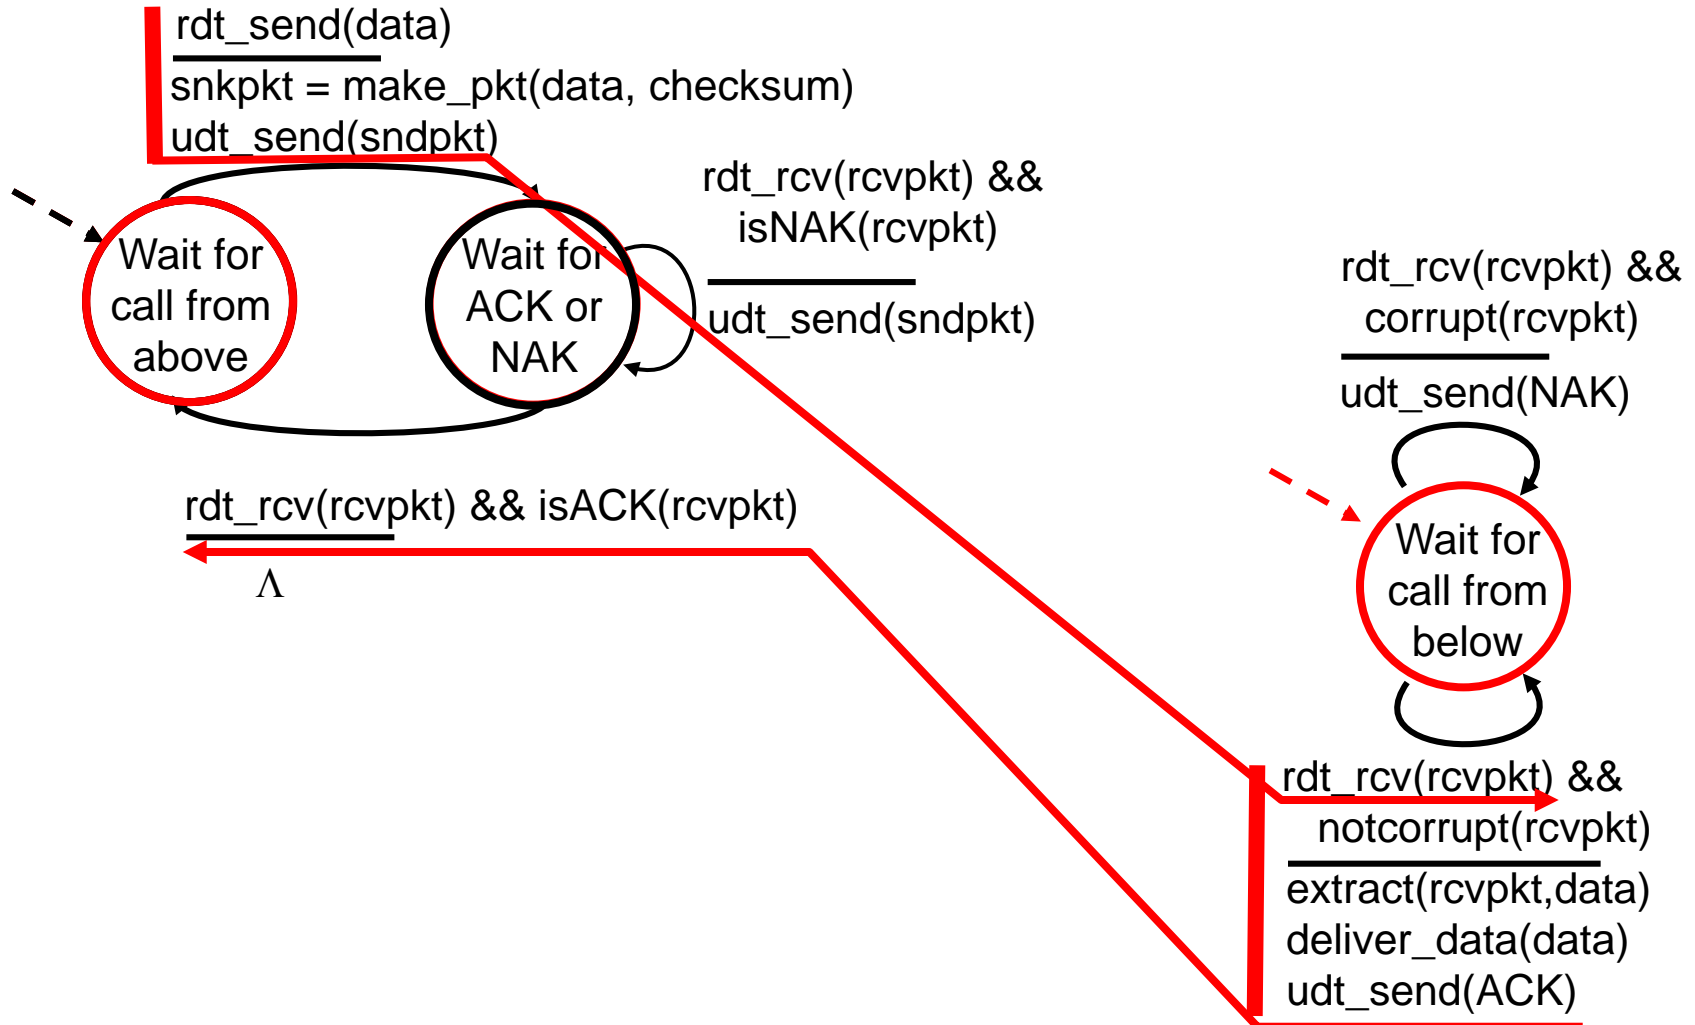



# rdt2.0: error scenario

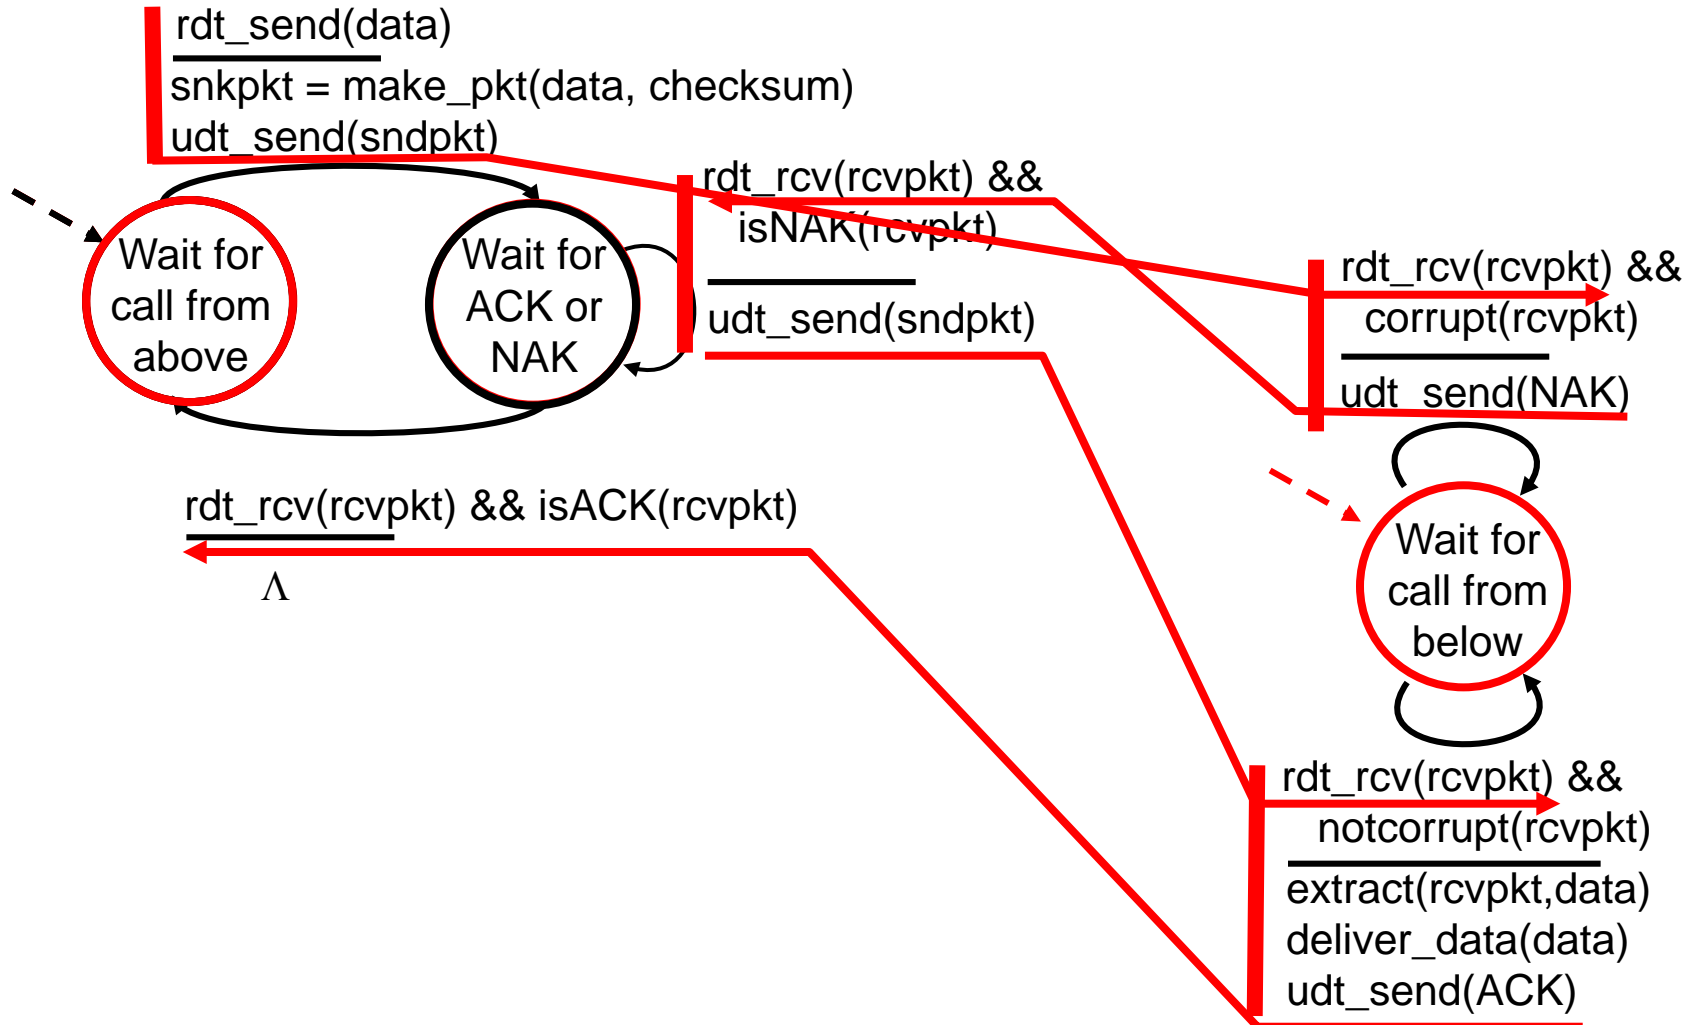

# rdt2.0 has a fatal flaw!

## what happens if ACK/NAK corrupted?

- ❖ sender doesn't know what happened at receiver!
- ❖ can't just retransmit: possible duplicate

## handling duplicates:

- ❖ sender retransmits current pkt if ACK/NAK corrupted
- ❖ sender adds *sequence number* to each pkt
- ❖ receiver discards (doesn't deliver up) duplicate pkt


## stop and wait

sender sends one packet,  
then waits for receiver  
response


# rdt2.1: idea

- ❖ Sender puts a seq num **0** or **1** to each segment.
- ❖ It sends a segment with **0** and then wait for an ACK.
- ❖ If receives ACK
  - Sends a segment with **1**
- ❖ If receives NAK or corrupted ACK
  - Resends the segment with **0**.
- ❖ Receiver receives a segment with **0**.
  - Replies an ACK.
- ❖ Then if it receives a segment with **1**.
  - The sender must received the ACK.
- ❖ If receives a segment with **0**.
  - The sender did not receive the ACK.

# rdt2.1: sender, handles garbled ACK/NAKs

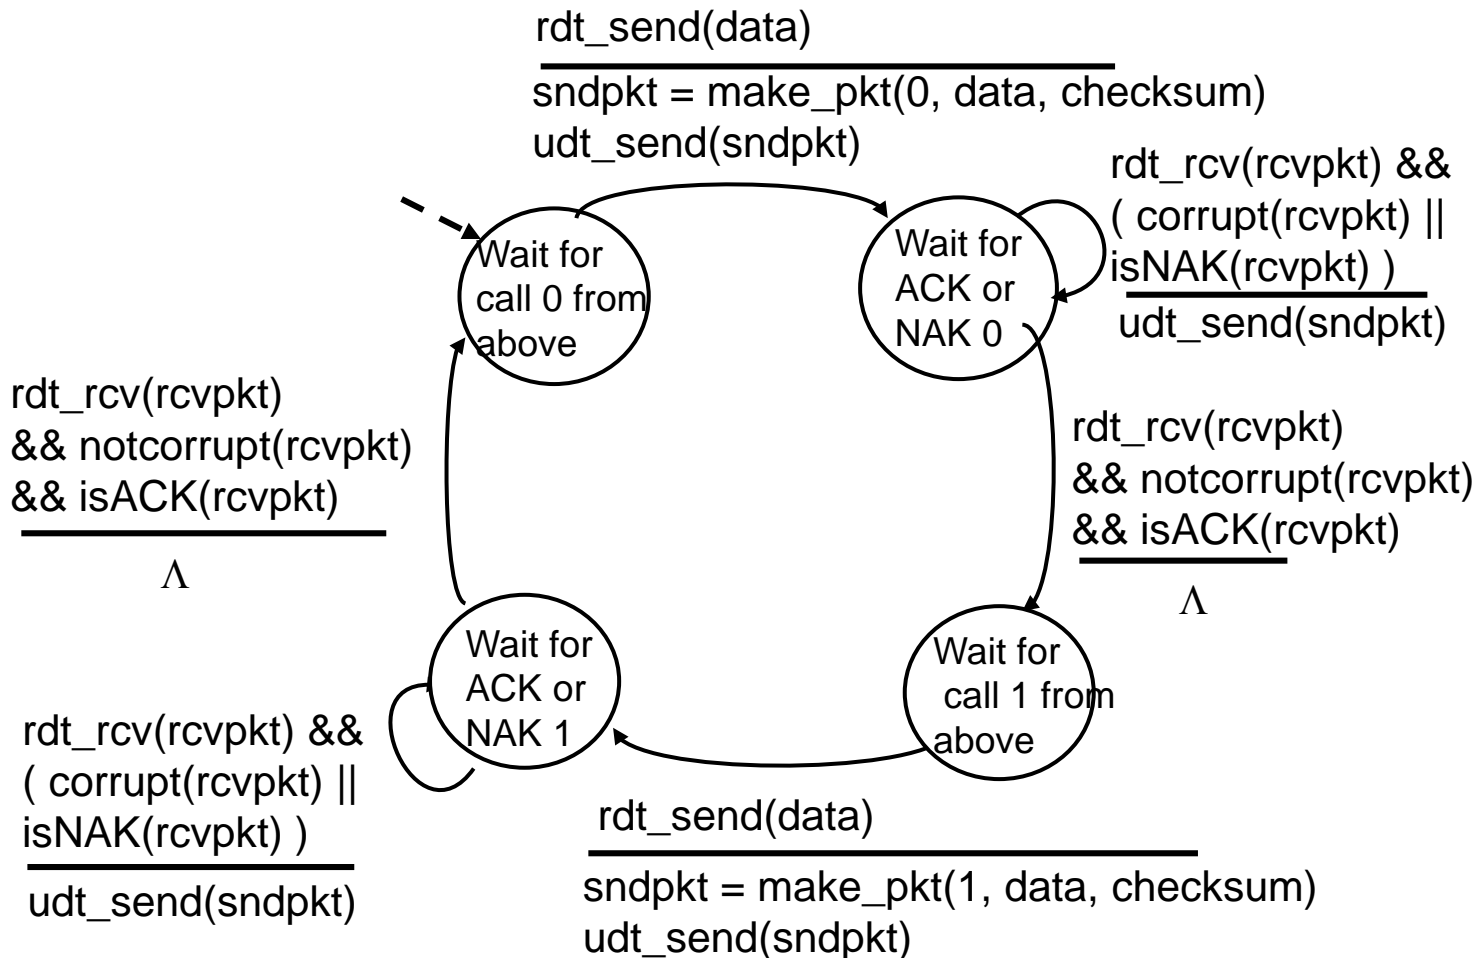

# rdt2.1: receiver, handles garbled ACK/NAKs

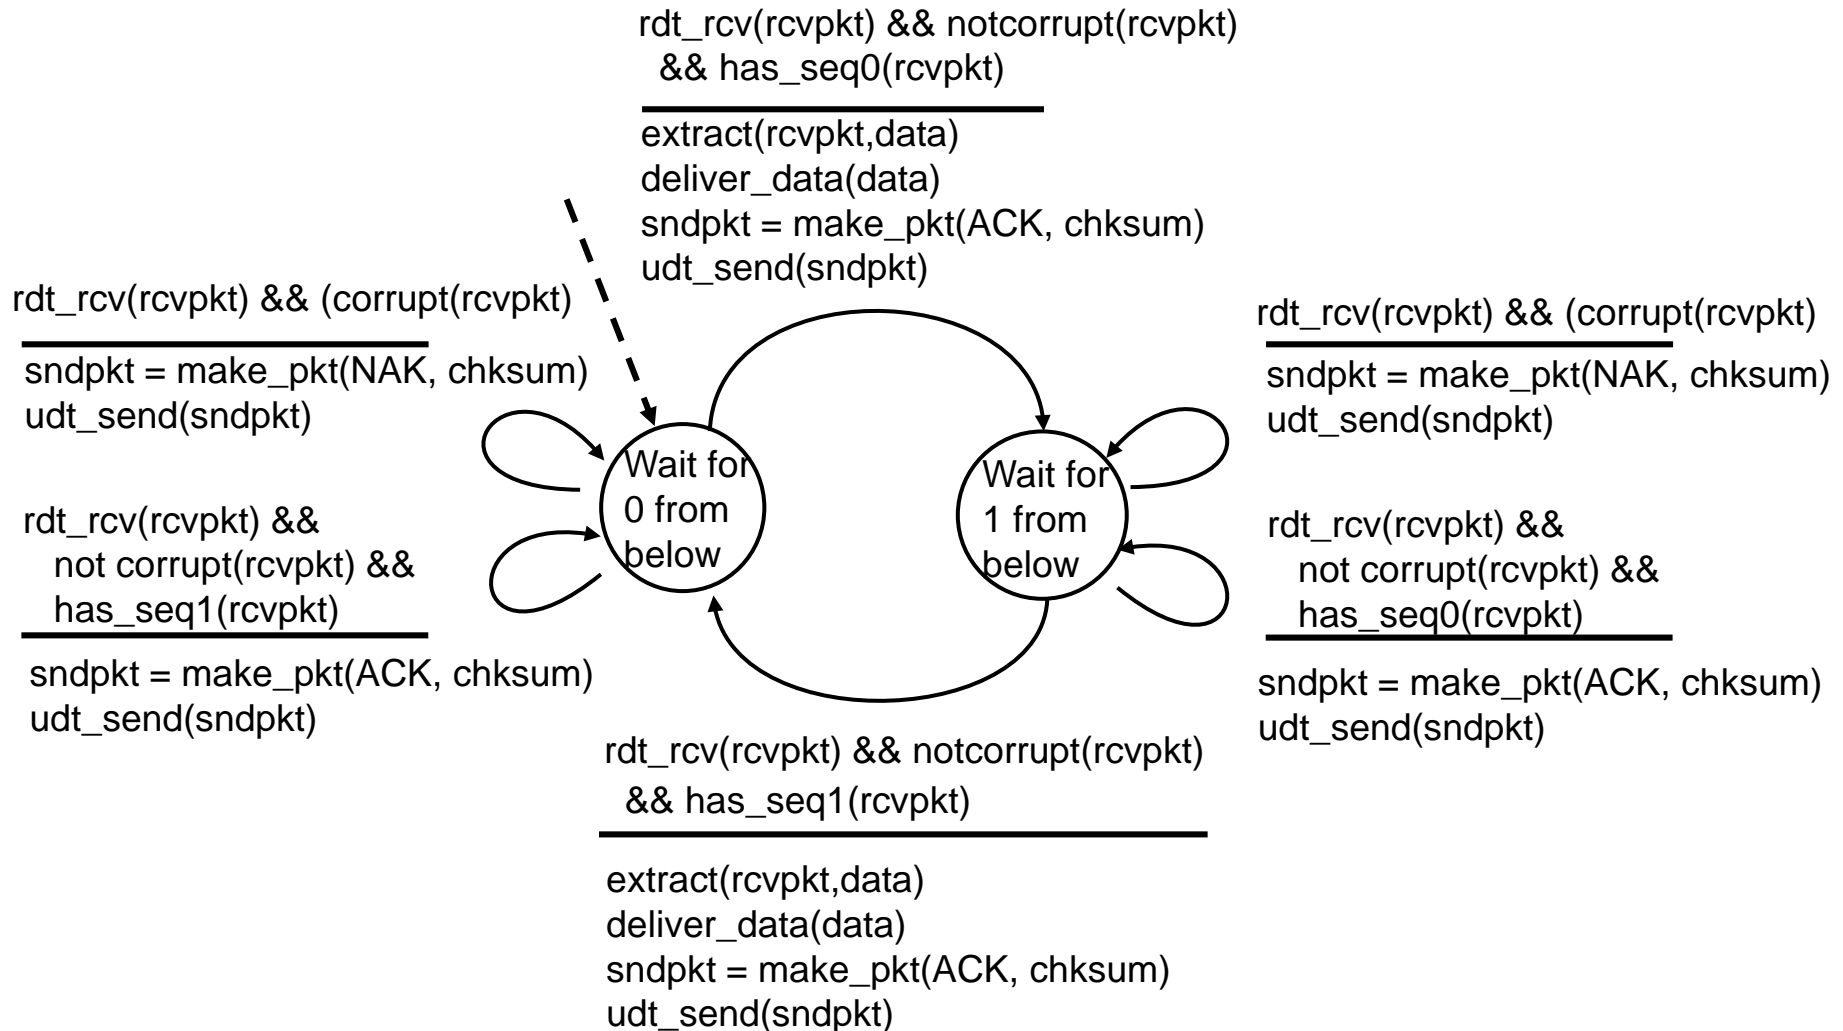

# rdt2.1: discussion

## sender:

- ❖ seq # added to pkt
- ❖ two seq. #'s (0,1) will suffice. Why?
- ❖ must check if received ACK/NAK corrupted
- ❖ twice as many states
  - state must “remember” whether “expected” pkt should have seq # of 0 or 1


## receiver:

- ❖ must check if received packet is duplicate
  - state indicates whether 0 or 1 is expected pkt seq #
- ❖ note: receiver can *not* know if its last ACK/NAK received OK at sender

# rdt2.2: a NAK-free protocol

- ❖ same functionality as rdt2.1, using ACKs only
- ❖ instead of NAK, receiver sends ACK for last pkt received OK
  - receiver must *explicitly* include seq # of pkt being ACKed
- ❖ duplicate ACK at sender results in same action as NAK: *retransmit current pkt*

# rdt2.2: sender, receiver fragments

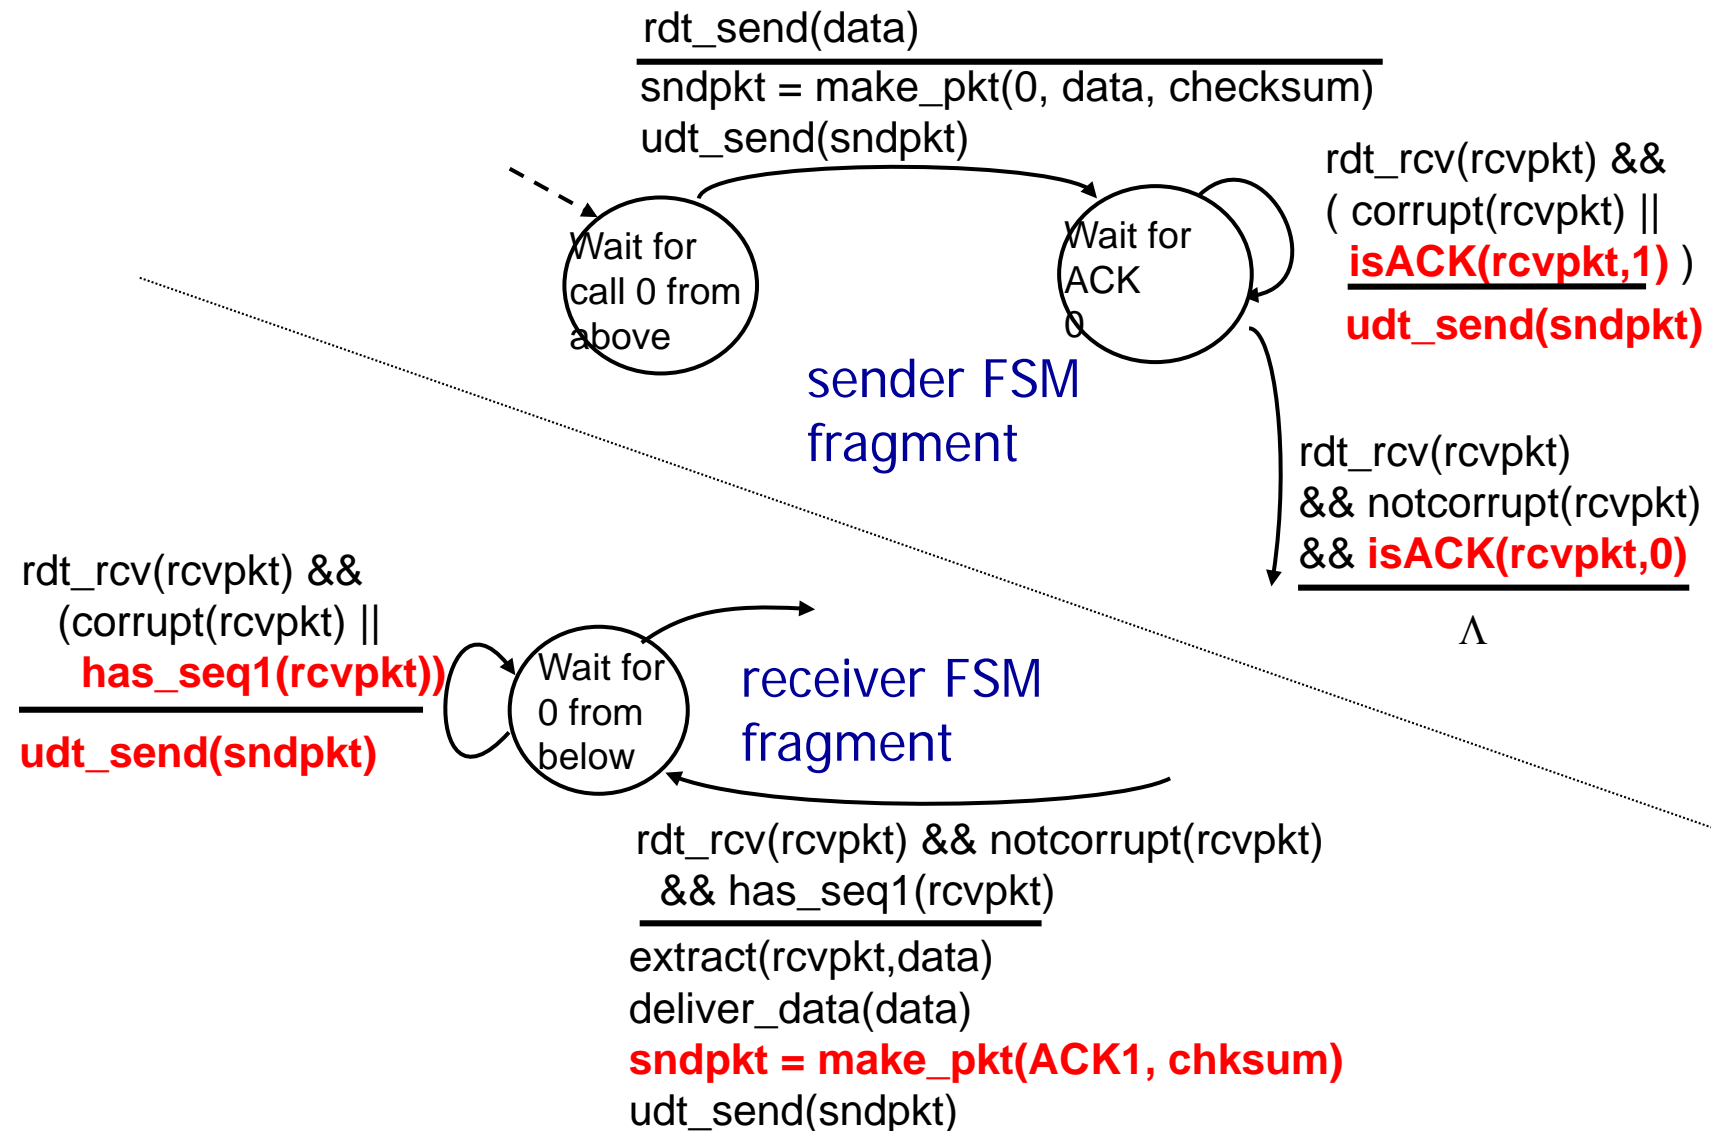



# rdt3.0: channels with errors and loss

## new assumption:


underlying channel can also lose packets (data, ACKs)

- checksum, seq. #, ACKs, retransmissions will be of help ... but not enough

approach: sender waits “reasonable” amount of time for ACK


- ❖ retransmits if no ACK received in this time
- ❖ if pkt (or ACK) just delayed (not lost):
  - retransmission will be duplicate, but seq. #'s already handles this
  - receiver must specify seq # of pkt being ACKed
- ❖ requires countdown timer

# rdt3.0 sender

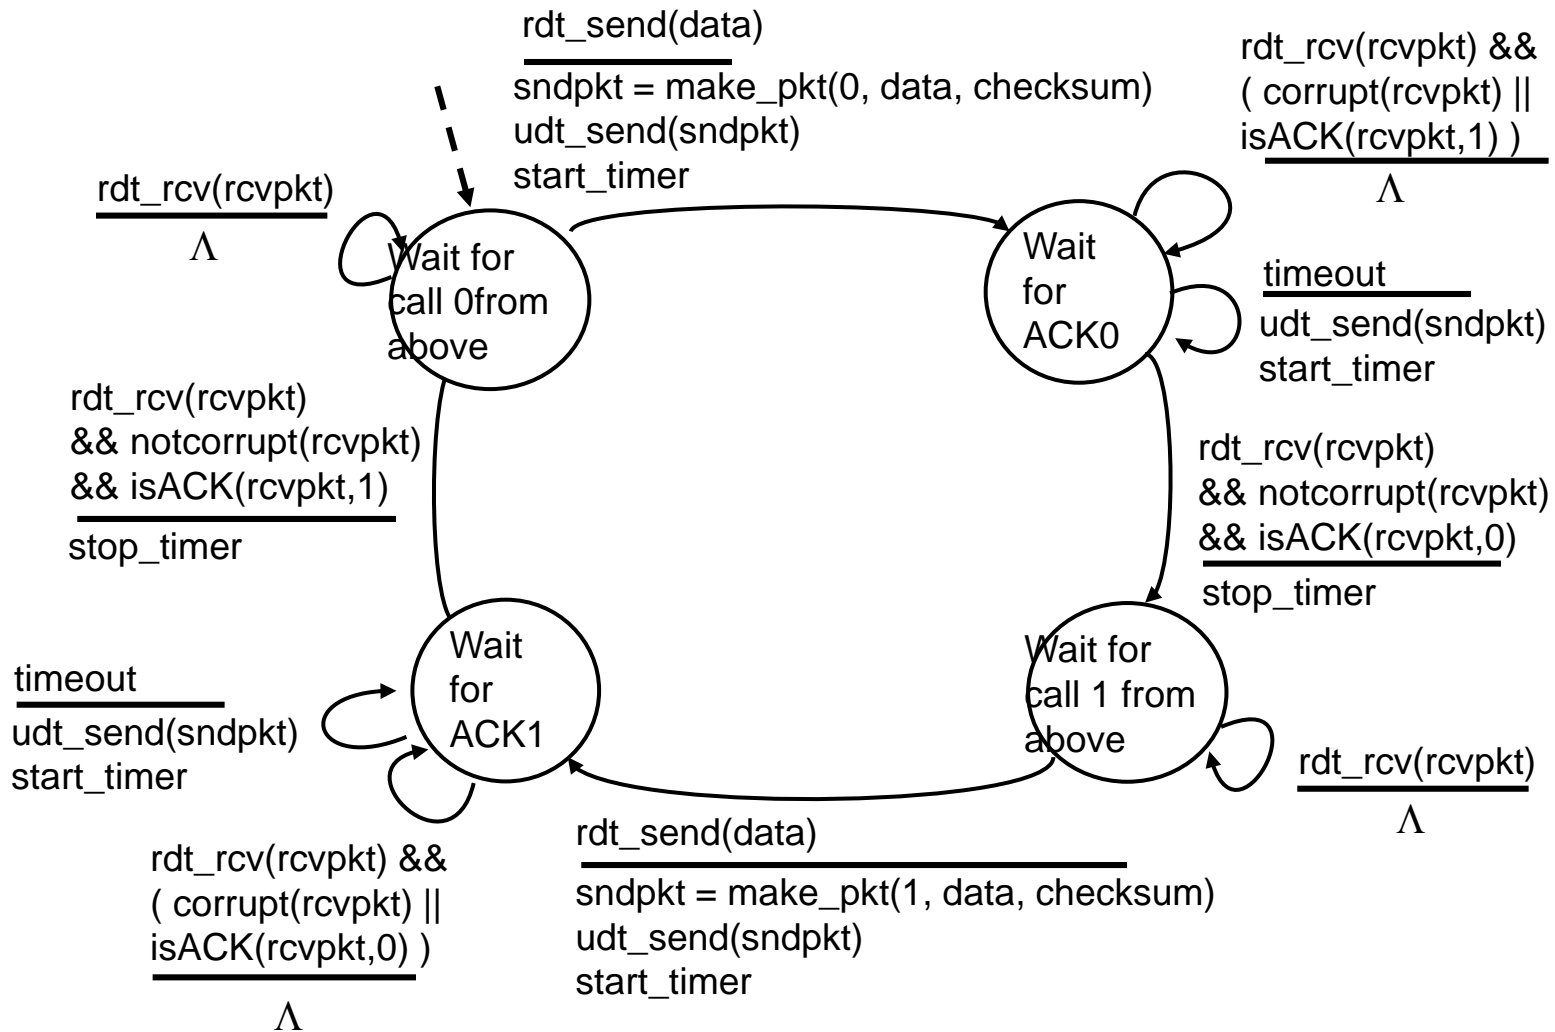




# rdt3.0 in action

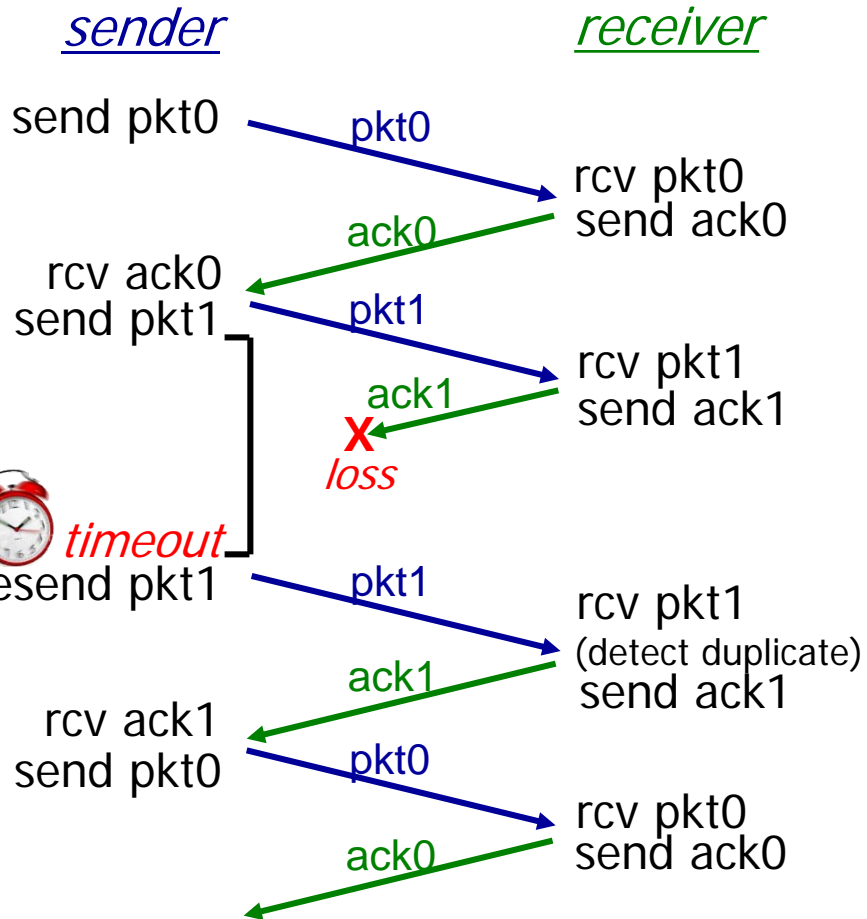

(c) ACK loss

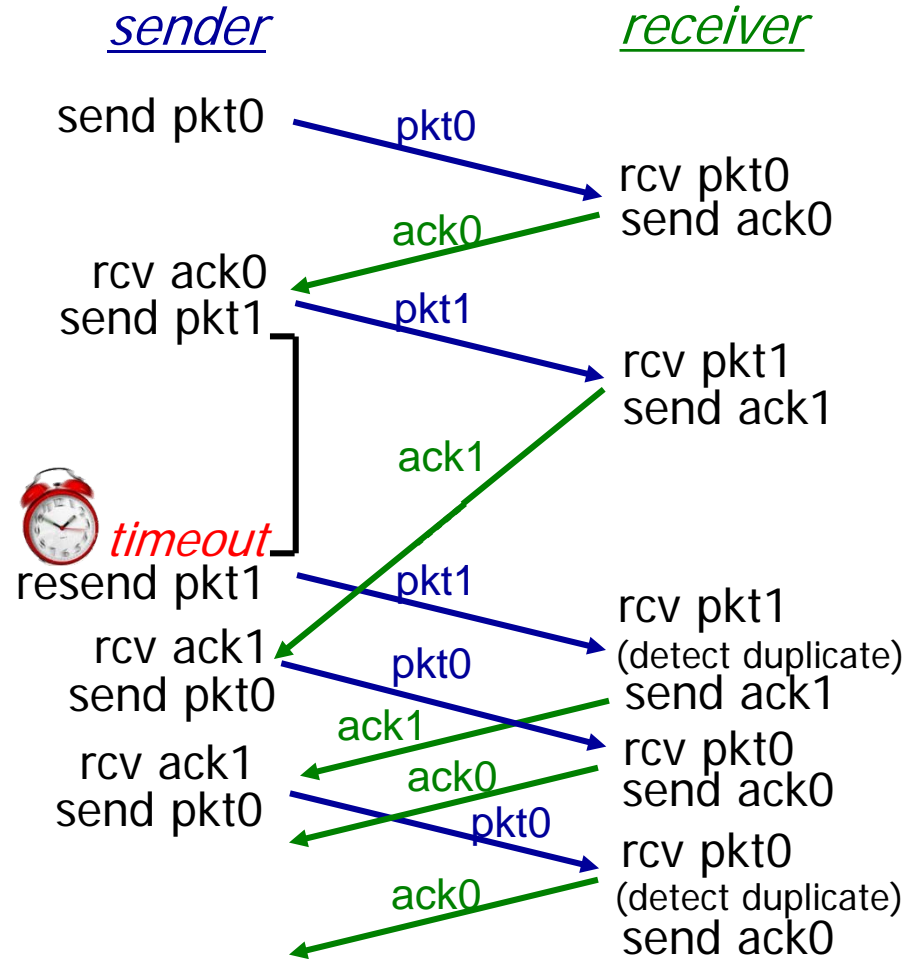

(d) premature timeout/ delayed ACK

# Performance of rdt3.0

- ❖ rdt3.0 is correct, but performance stinks
- ❖ e.g.: 1 Gbps link, 15 ms prop. delay, 8000 bit packet:


$$D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microseconds}$$

- $U_{sender}$ : **utilization** – fraction of time sender busy sending

$$U_{sender} = \frac{L/R}{RTT + L/R} = \frac{.008}{30.008} = 0.00027$$

- if RTT=30 msec, 1KB pkt every 30 msec: 33kB/sec thruput over 1 Gbps link
- ❖ network protocol limits use of physical resources!

# rdt3.0: stop-and-wait operation

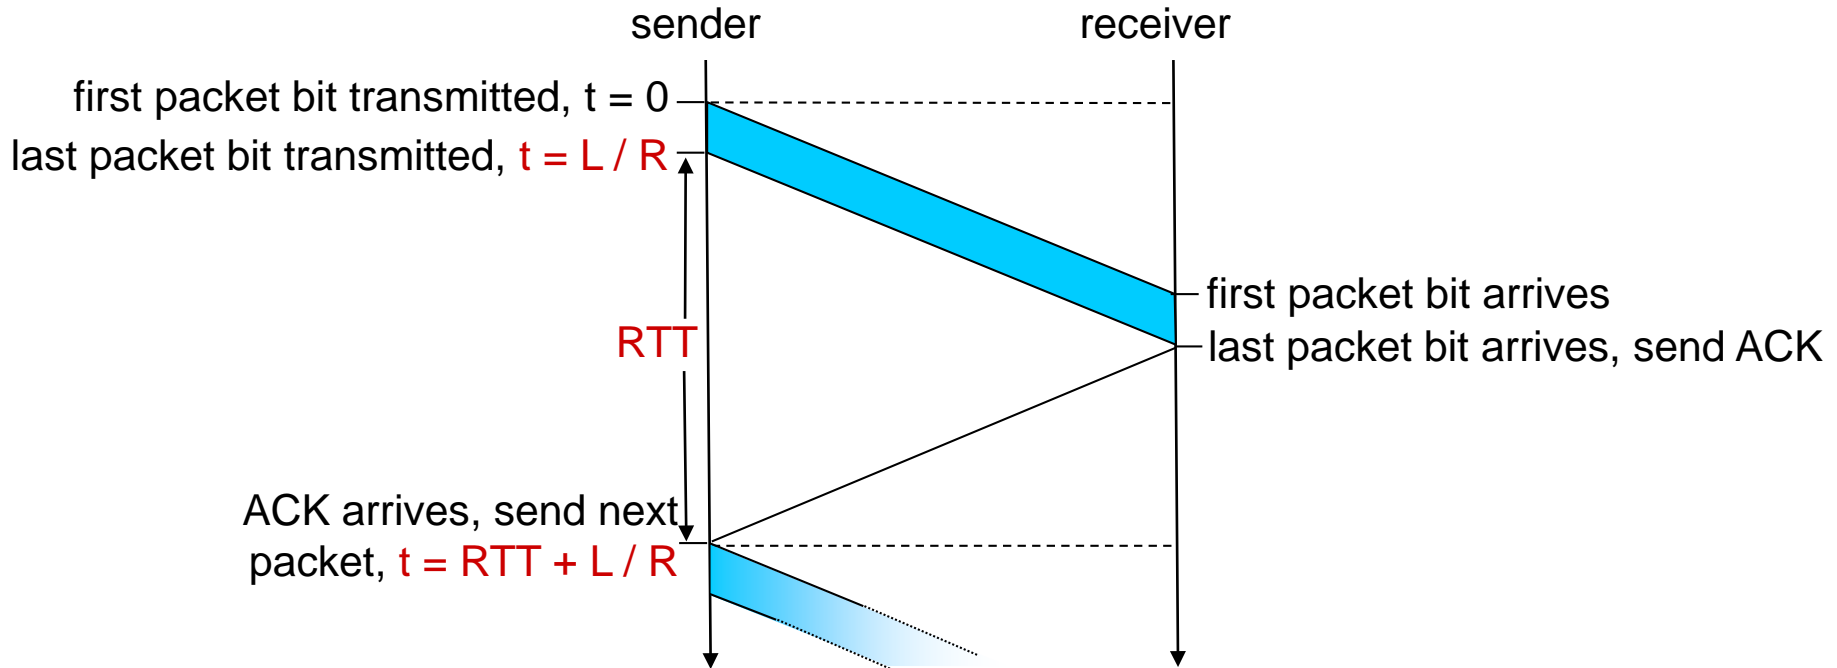


$$U_{\text{sender}} = \frac{L/R}{RTT + L/R} = \frac{.008}{30.008} = 0.00027$$

# Pipelined protocols

**pipelining:** sender allows multiple, “in-flight”, yet-to-be-acknowledged pkts

- range of sequence numbers must be increased
- buffering at sender and/or receiver

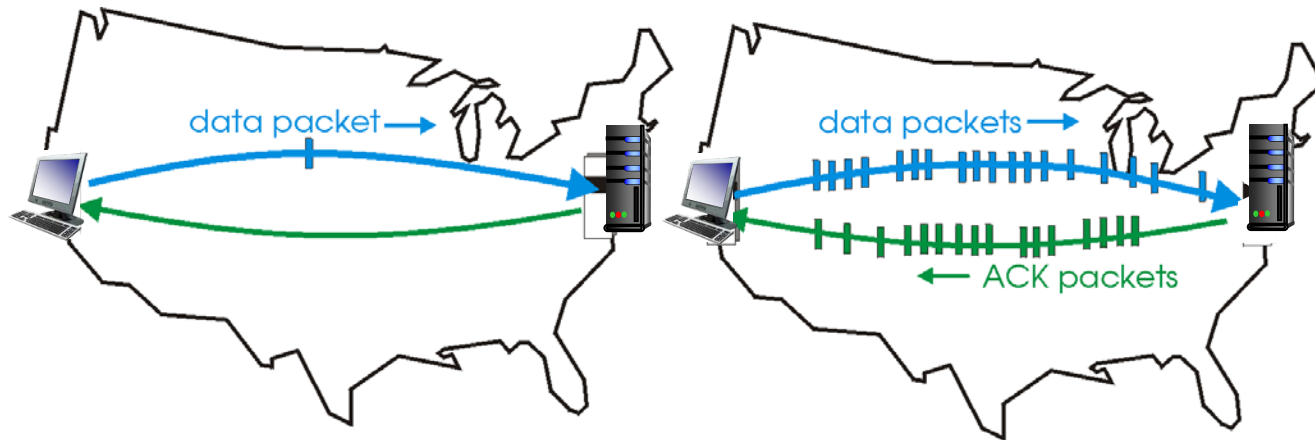


(a) a stop-and-wait protocol in operation

(b) a pipelined protocol in operation

- ❖ two generic forms of pipelined protocols: *go-Back-N*, *selective repeat*

# Pipelining: increased utilization

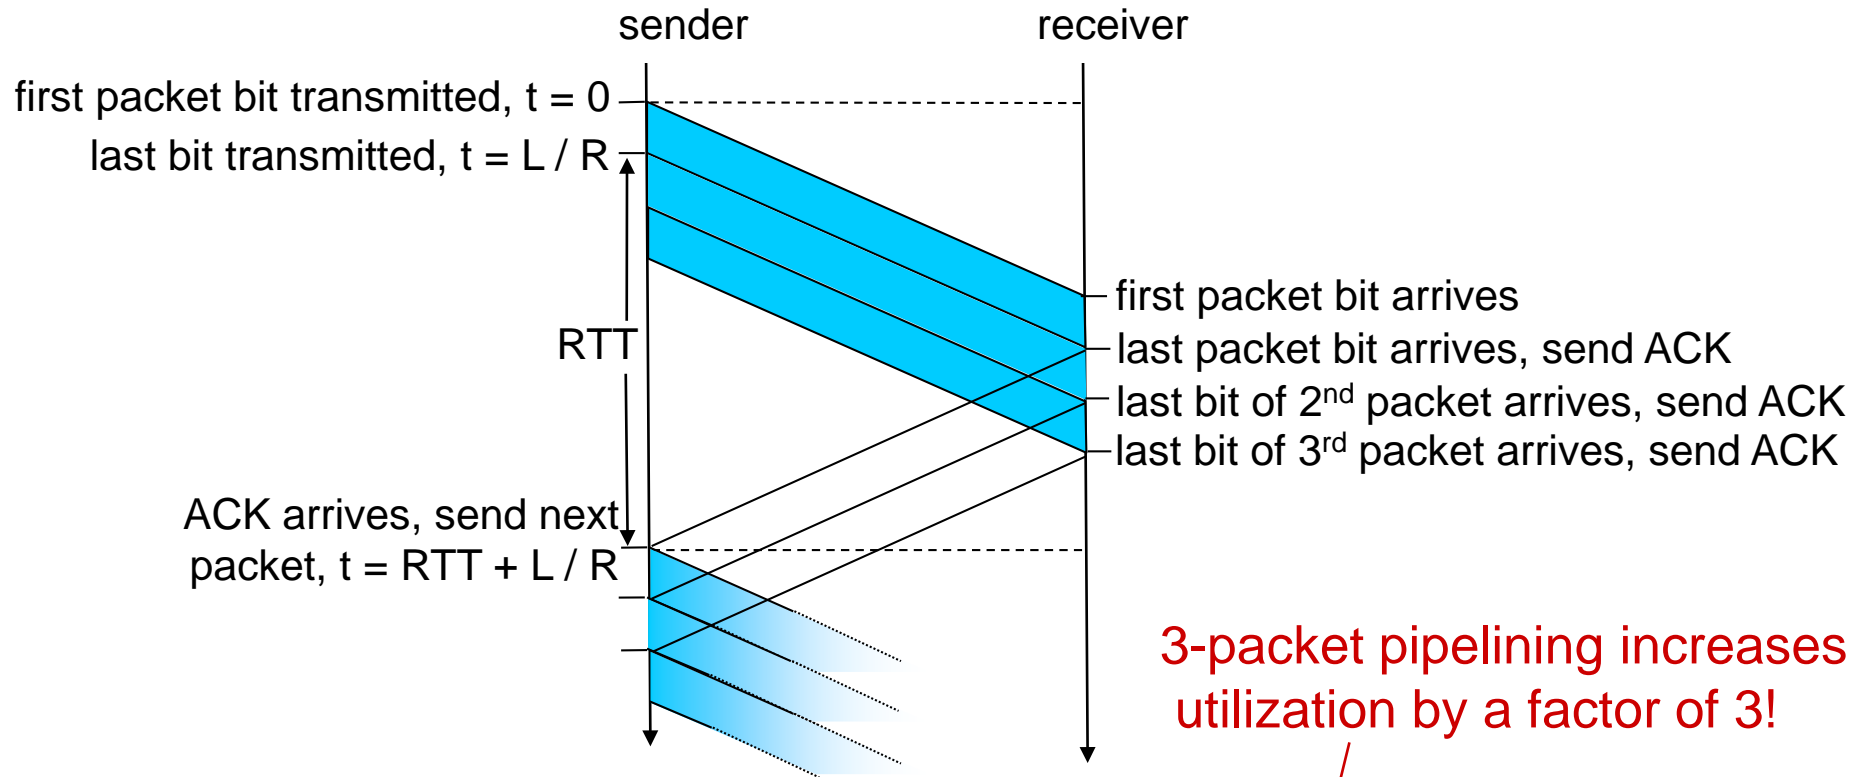

3-packet pipelining increases utilization by a factor of 3!

$$U_{sender} = \frac{3L / R}{RTT + L / R} = \frac{.0024}{30.008} = 0.00081$$



# Pipelined protocols: overview

## Go-back-N:


- ❖ sender can have up to N unacked packets in pipeline
- ❖ receiver only sends *cumulative ack*
  - doesn't ack packet if there's a gap
- ❖ sender has timer for oldest unacked packet
  - when timer expires, retransmit *all* unacked packets

## Selective Repeat:

- ❖ sender can have up to N unack'ed packets in pipeline
- ❖ rcvr sends *individual ack* for each packet
- ❖ sender maintains timer for each unacked packet
  - when timer expires, retransmit only that unacked packet

# Go-Back-N: sender

- ❖ k-bit seq # in pkt header
- ❖ “window” of up to N, consecutive unack’ed pkts allowed

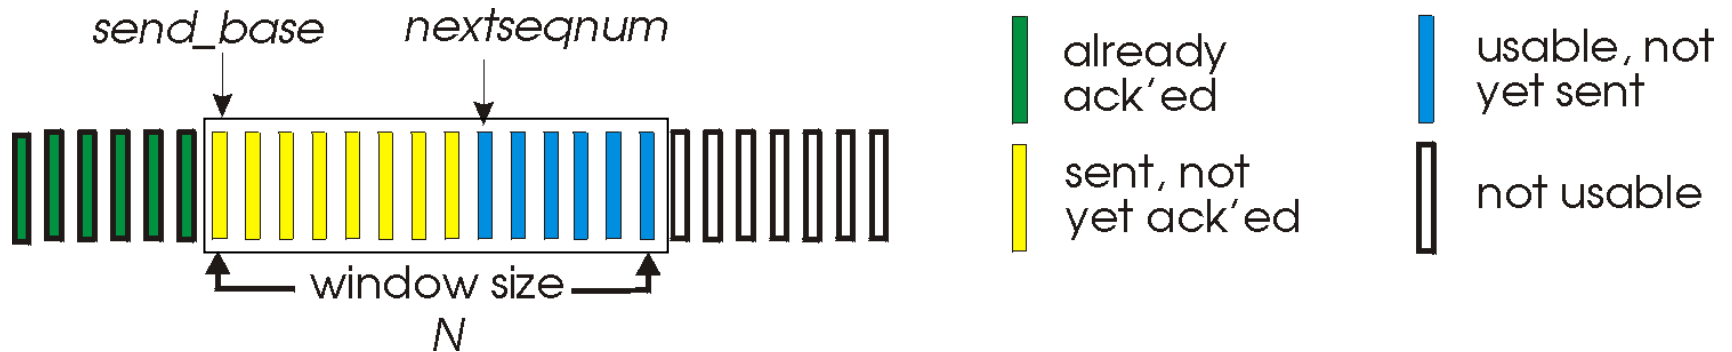


- ❖ ACK(n): ACKs all pkts up to, including seq # n - “cumulative ACK”
  - may receive duplicate ACKs (see receiver)
- ❖ timer for oldest in-flight pkt
- ❖ *timeout(n)*: retransmit packet n and all higher seq # pkts in window


# Animation

[http://www.ccs-labs.org/teaching/rn/animations/gbn\\_sr/](http://www.ccs-labs.org/teaching/rn/animations/gbn_sr/)

# GBN: sender extended FSM

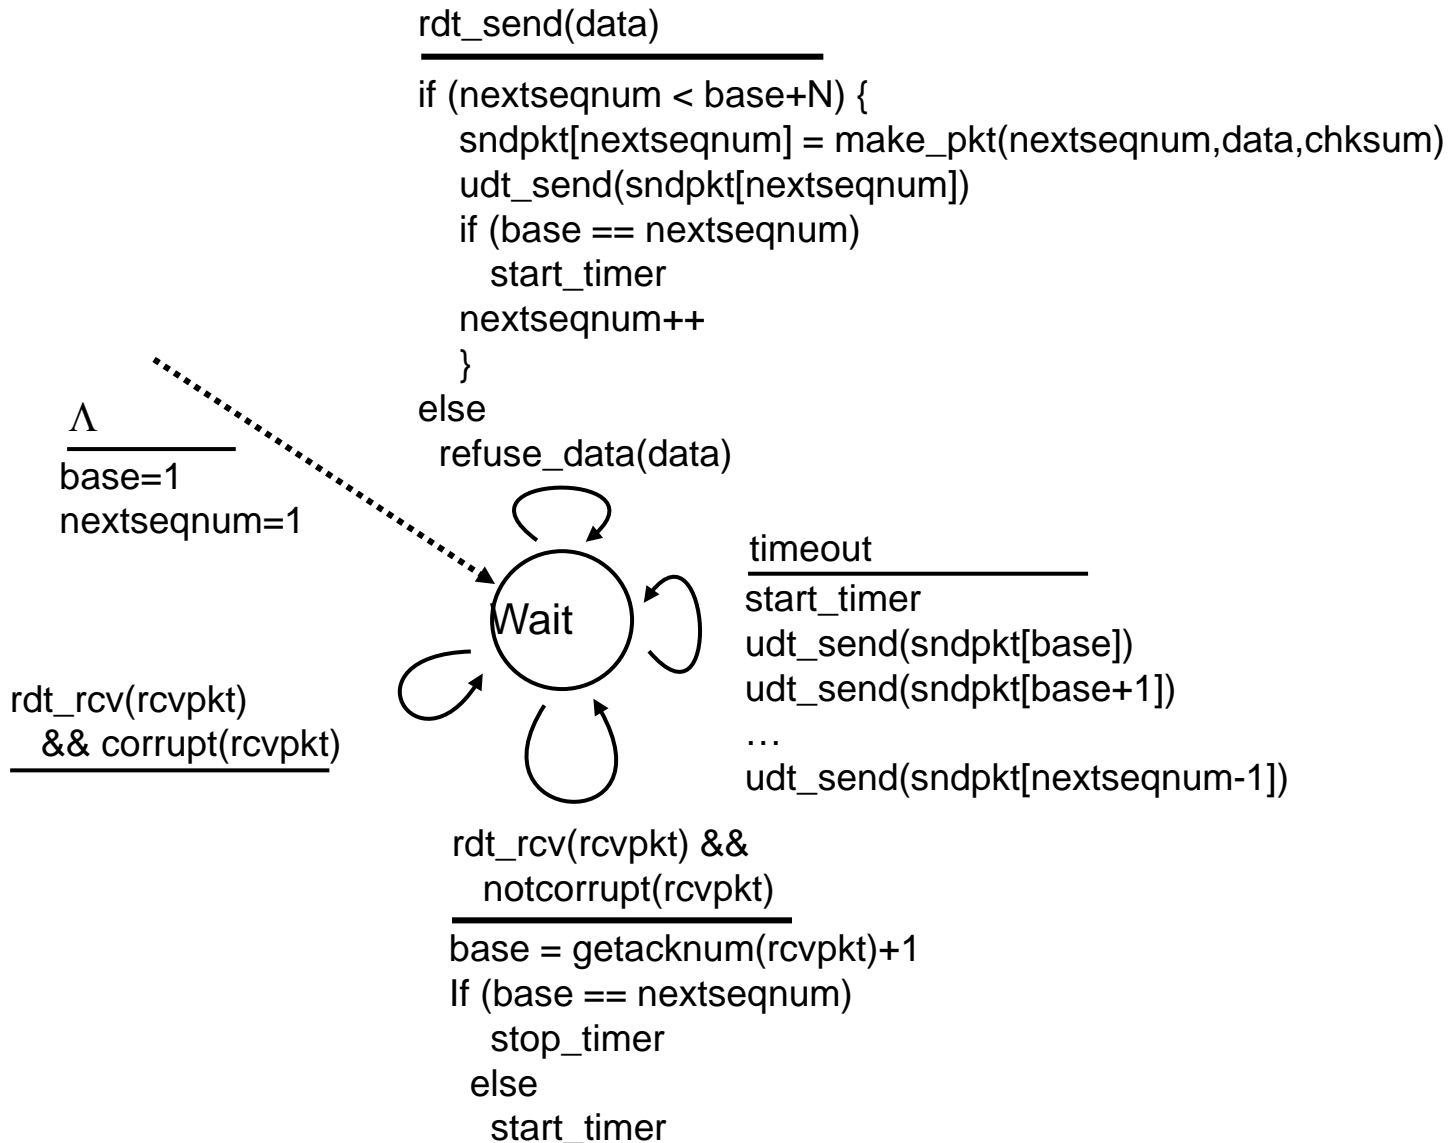

# GBN: receiver extended FSM

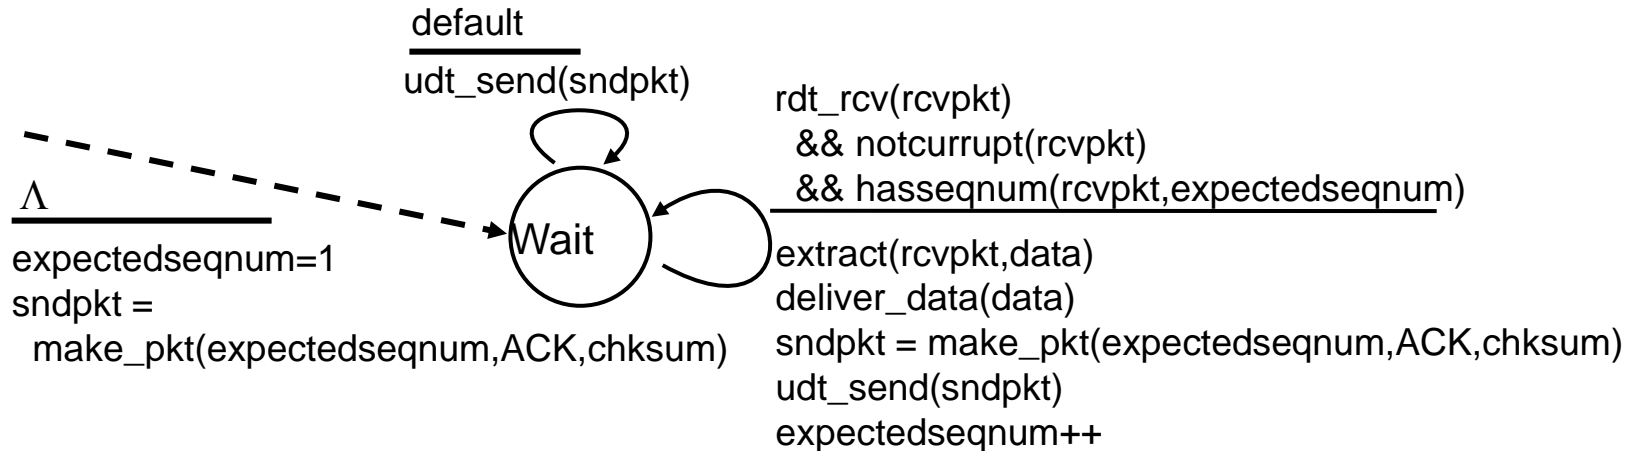

ACK-only: always send ACK for correctly-received pkt with highest *in-order* seq #

- may generate duplicate ACKs
- need only remember **expectedseqnum**
- ❖ out-of-order pkt:
  - discard (don't buffer): *no receiver buffering!*
  - re-ACK pkt with highest in-order seq #

# GBN in action

sender window (N=4)

0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8

0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8

0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8  
 0 1 2 3 4 5 6 7 8

sender

send pkt0  
 send pkt1  
 send pkt2  
 send pkt3  
 (wait)

rcv ack0, send pkt4  
 rcv ack1, send pkt5

ignore duplicate ACK



*pkt 2 timeout*

send pkt2  
 send pkt3  
 send pkt4  
 send pkt5

receiver

receive pkt0, send ack0  
 receive pkt1, send ack1

receive pkt3, discard,  
 (re)send ack1

receive pkt4, discard,  
 (re)send ack1

receive pkt5, discard,  
 (re)send ack1


rcv pkt2, deliver, send ack2  
 rcv pkt3, deliver, send ack3  
 rcv pkt4, deliver, send ack4  
 rcv pkt5, deliver, send ack5

*X loss*

# Selective repeat

- ❖ receiver *individually* acknowledges all correctly received pkts
  - buffers pkts, as needed, for eventual in-order delivery to upper layer
- ❖ sender only resends pkts for which ACK not received
  - sender timer for each unACKed pkt
- ❖ sender window
  - $N$  consecutive seq #'s
  - limits seq #'s of sent, unACKed pkts

# Selective repeat: sender, receiver windows

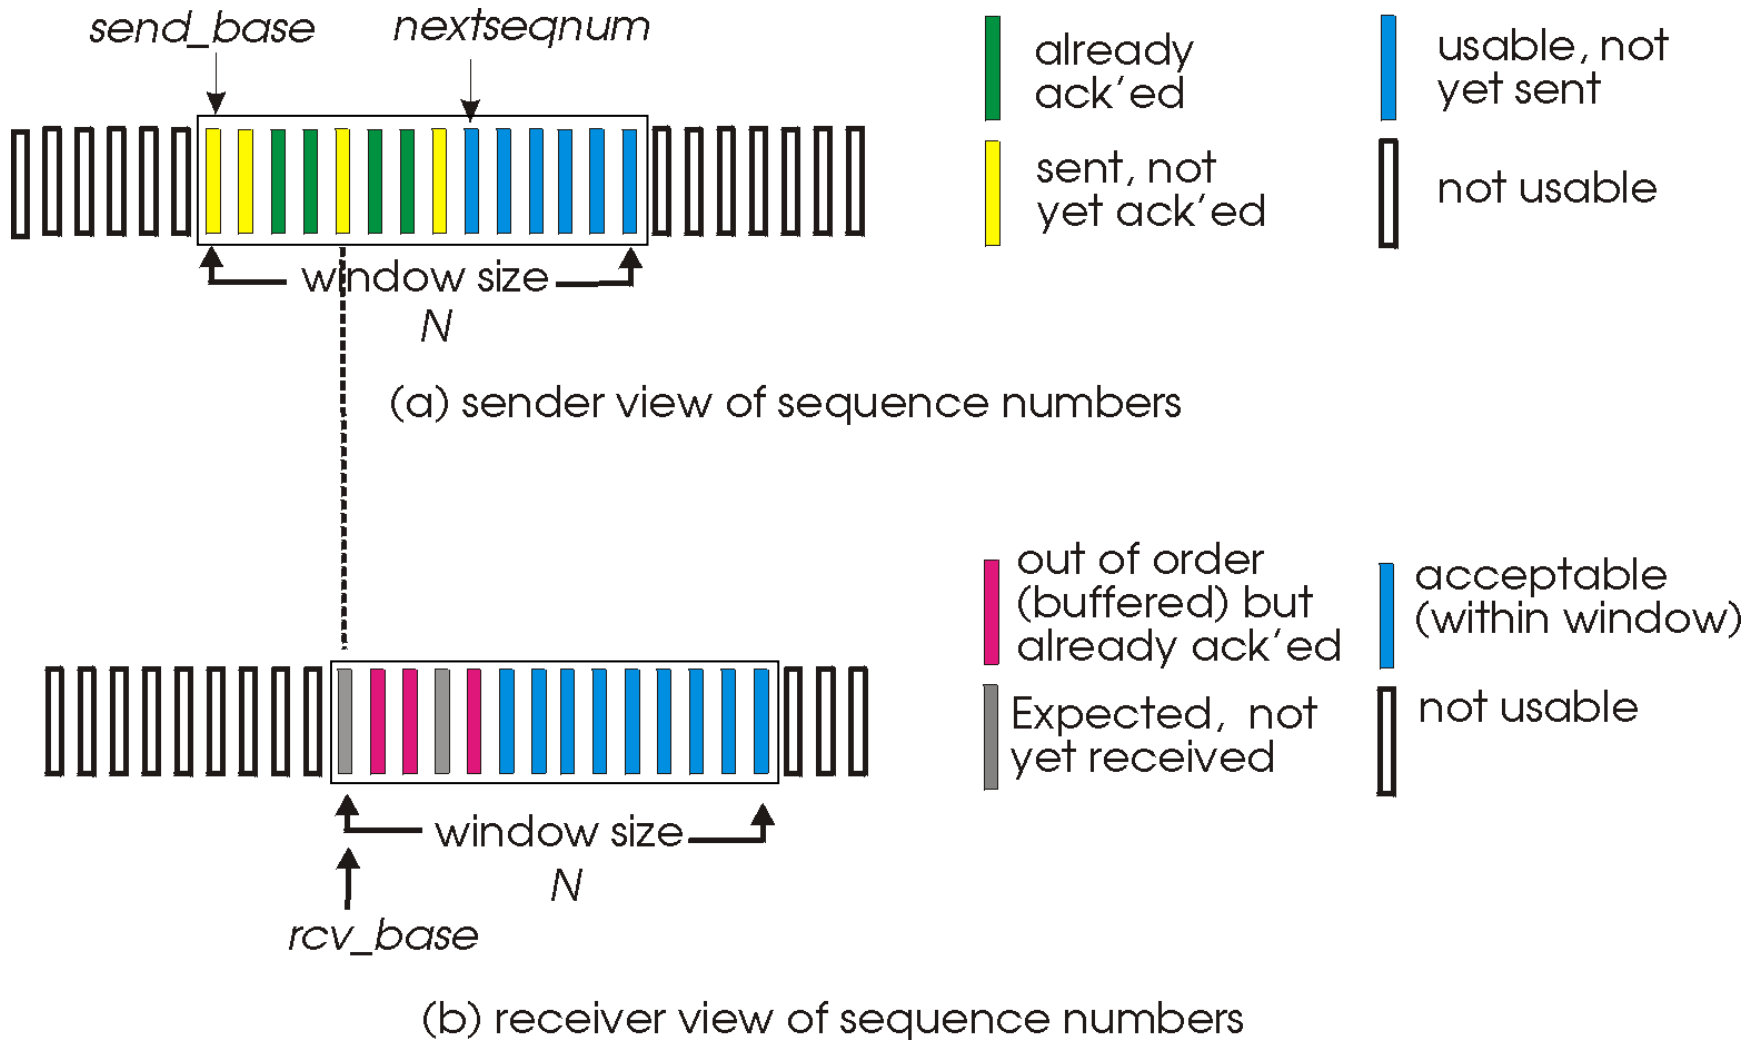



# Selective repeat

## sender

### data from above:

- ❖ if next available seq # in window, send pkt

### timeout(n):

- ❖ resend pkt n, restart timer

### ACK(n) in [sendbase,sendbase+N]:

- ❖ mark pkt n as received
- ❖ if n smallest unACKed pkt, advance window base to next unACKed seq #

## receiver

### pkt n in [rcvbase,rcvbase+N-1]

- ❖ send ACK(n)
- ❖ out-of-order: buffer
- ❖ in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt

### pkt n in [rcvbase-N,rcvbase-1]

- ❖ ACK(n)

### otherwise:



- ❖ ignore

# Animation

[http://www.ccs-labs.org/teaching/rn/animations/gbn\\_sr/](http://www.ccs-labs.org/teaching/rn/animations/gbn_sr/)

# Selective repeat in action

sender window (N=4)



sender

send pkt0  
 send pkt1  
 send pkt2  
 send pkt3  
 (wait)

rcv ack0, send pkt4  
 rcv ack1, send pkt5

record ack3 arrived



*pkt 2 timeout*

send pkt2  
 record ack4 arrived  
 record ack4 arrived

*Q: what happens when ack2 arrives?*

receiver

receive pkt0, send ack0  
 receive pkt1, send ack1  
 receive pkt3, buffer, send ack3  
 receive pkt4, buffer, send ack4  
 receive pkt5, buffer, send ack5  
 rcv pkt2; deliver pkt2, pkt3, pkt4, pkt5; send ack2

*X loss*

# Selective repeat: dilemma


example:

- ❖ seq #'s: 0, 1, 2, 3
- ❖ window size=3
- ❖ receiver sees no difference in two scenarios!
- ❖ duplicate data accepted as new in (b)


Q: what relationship between seq # size and window size to avoid problem in (b)?

sender window  
(after receipt)

receiver window  
(after receipt)

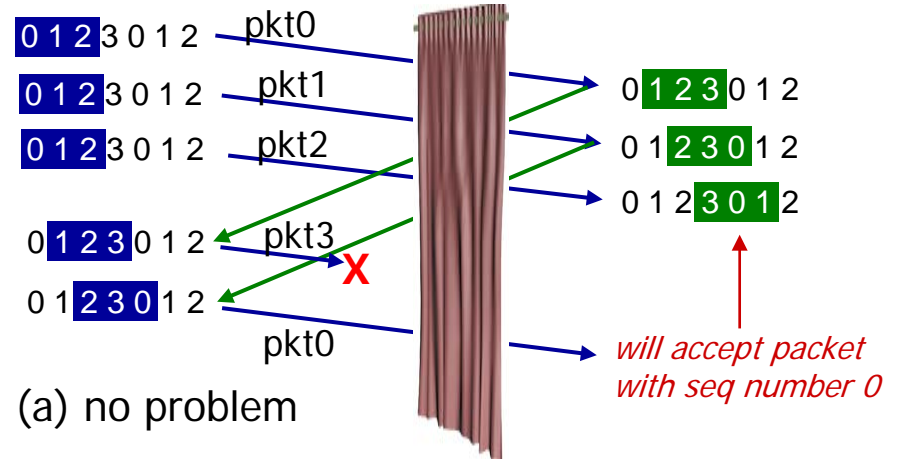

*receiver can't see sender side.  
receiver behavior identical in both cases!  
something's (very) wrong!*

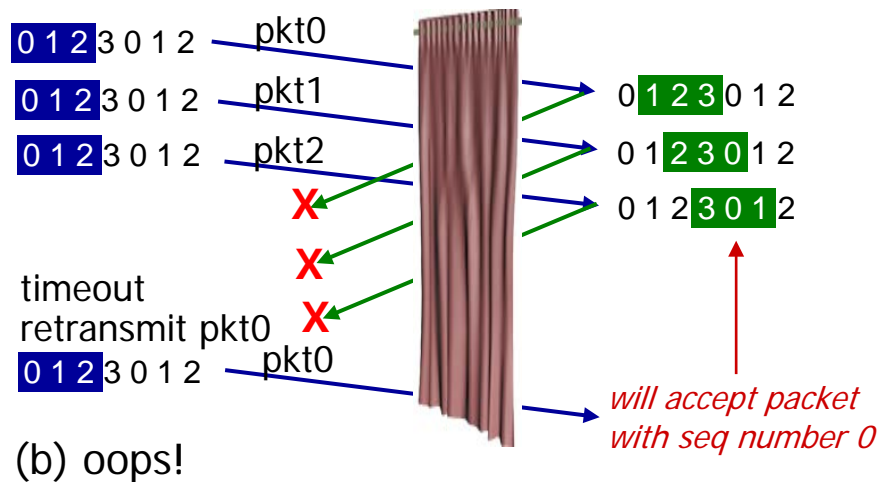

# Next class

- ❖ Please read Chapter 3.5-3.6 of your textbook  
**BEFORE** Class