

# CMPE 150/L : Introduction to Computer Networks

Chen Qian

Computer Engineering  
UCSC Baskin Engineering

Lecture 15

# Start your final project ASAP

- ❑ Due date: 3/19
- ❑ Has been posted online

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP


4.7 broadcast and multicast routing

# Intra-AS Routing

- ❖ also known as *interior gateway protocols (IGP)*
- ❖ most common intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

# RIP ( Routing Information Protocol)


- ❖ included in BSD-UNIX distribution in 1982
- ❖ distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka **advertisement**)
  - each advertisement: list of up to 25 destination **subnets** (in IP addressing sense)

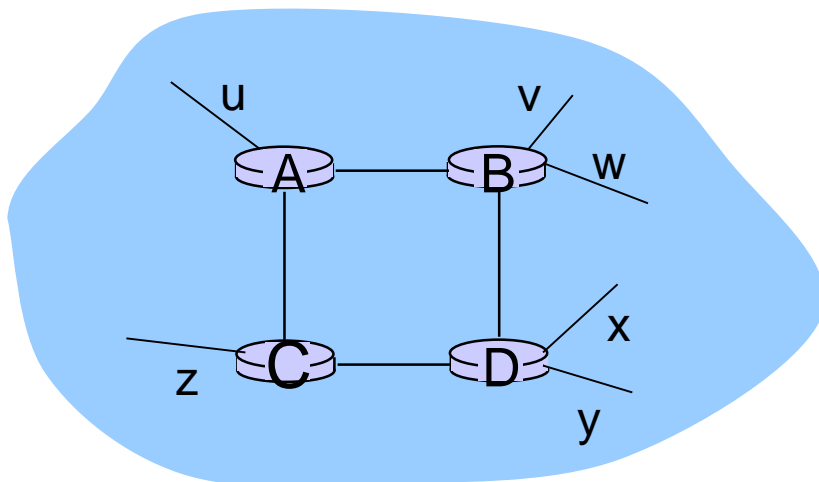

from router A to destination **subnets**:

<u>subnet</u>	<u>hops</u>
u	1
v	2
w	2
x	3
y	3
z	2

# RIP: example

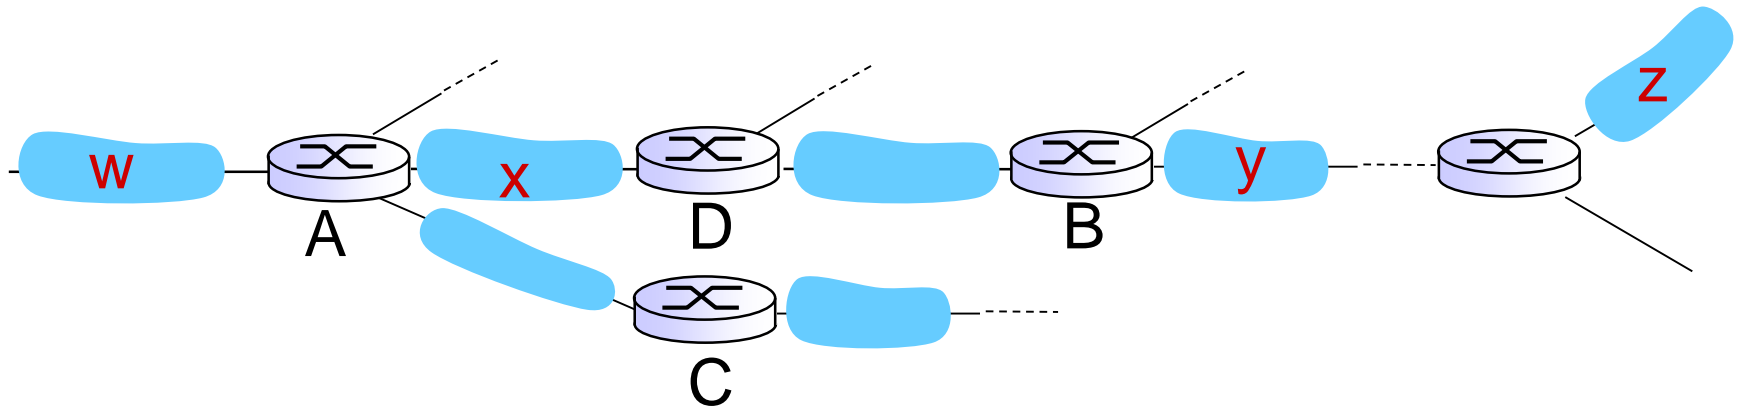


routing table in router D

destination subnet	next router	# hops to dest
W	A	2
y	B	2
Z	B	7
X	--	1
....	....	....

# RIP: example

A-to-D advertisement

dest	next	hops
W	-	1
X	-	1
Z	C	4
....	....	....

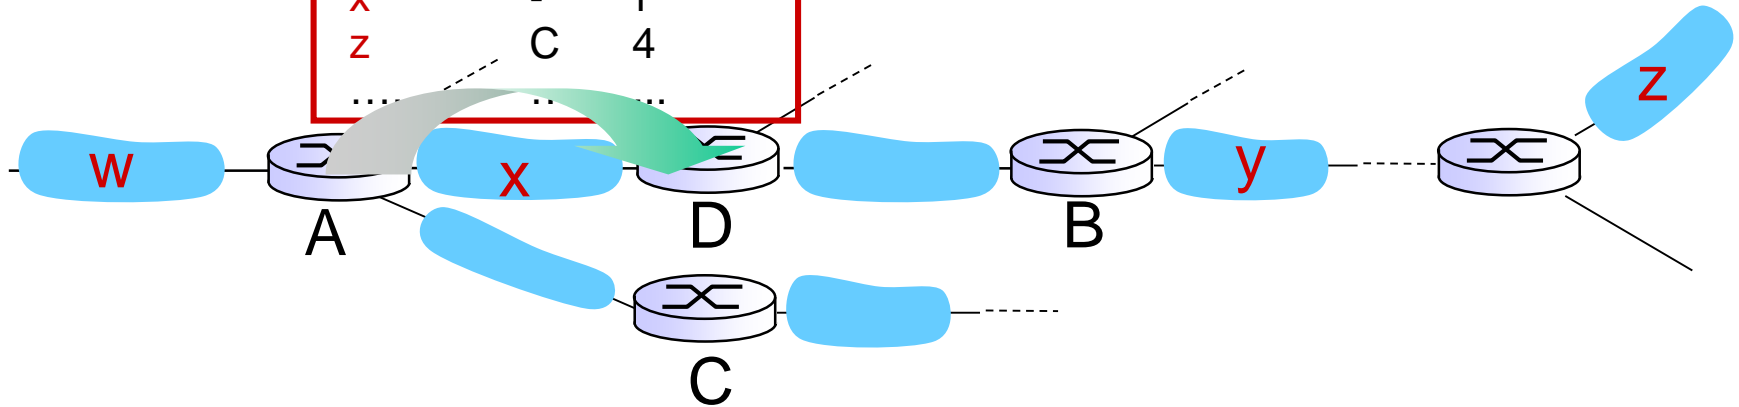

routing table in router D

destination subnet	next router	# hops to dest
W	A	2
y	B	2
Z	<del>B</del> → A	<del>7</del> → 5
X	--	1
....	....	....

# RIP: link failure, recovery

if no advertisement heard after 180 sec -->  
neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net



# OSPF (Open Shortest Path First)

- ❖ “open”: publicly available
- ❖ uses link state algorithm
  - LS packet dissemination
  - topology map at each node
  - route computation using Dijkstra’s algorithm
- ❖ OSPF advertisement carries one entry per neighbor
- ❖ advertisements flooded to *entire* AS
  - carried in OSPF messages directly over IP (rather than TCP or UDP)
- ❖ *IS-IS routing* protocol: nearly identical to OSPF

# OSPF “advanced” features (not in RIP)


- ❖ **security**: all OSPF messages authenticated (to prevent malicious intrusion)
- ❖ **multiple** same-cost **paths** allowed (only one path in RIP)
- ❖ for each link, multiple cost metrics for different **TOS** (e.g., satellite link cost set “low” for best effort ToS; high for real time ToS)
- ❖ integrated uni- and **multicast** support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- ❖ **hierarchical** OSPF in large domains.

# Internet inter-AS routing: BGP

- ❖ **BGP (Border Gateway Protocol):** *the de facto inter-domain routing protocol*
  - “glue that holds the Internet together”
- ❖ BGP provides each AS a means to:
  - **eBGP:** obtain subnet reachability information from neighboring ASs.
  - **iBGP:** propagate reachability information to all AS-internal routers.
  - determine “good” routes to other networks based on reachability information and policy.
- ❖ allows subnet to advertise its existence to rest of Internet: *“I am here”*


# BGP basics

- ❖ **BGP session:** two BGP routers (“peers”) exchange BGP messages:
  - advertising *paths* to different destination network prefixes (“path vector” protocol)
  - exchanged over semi-permanent TCP connections
- ❖ when AS3 advertises a prefix to AS1:
  - AS3 *promises* it will forward datagrams towards that prefix
  - AS3 can aggregate prefixes in its advertisement

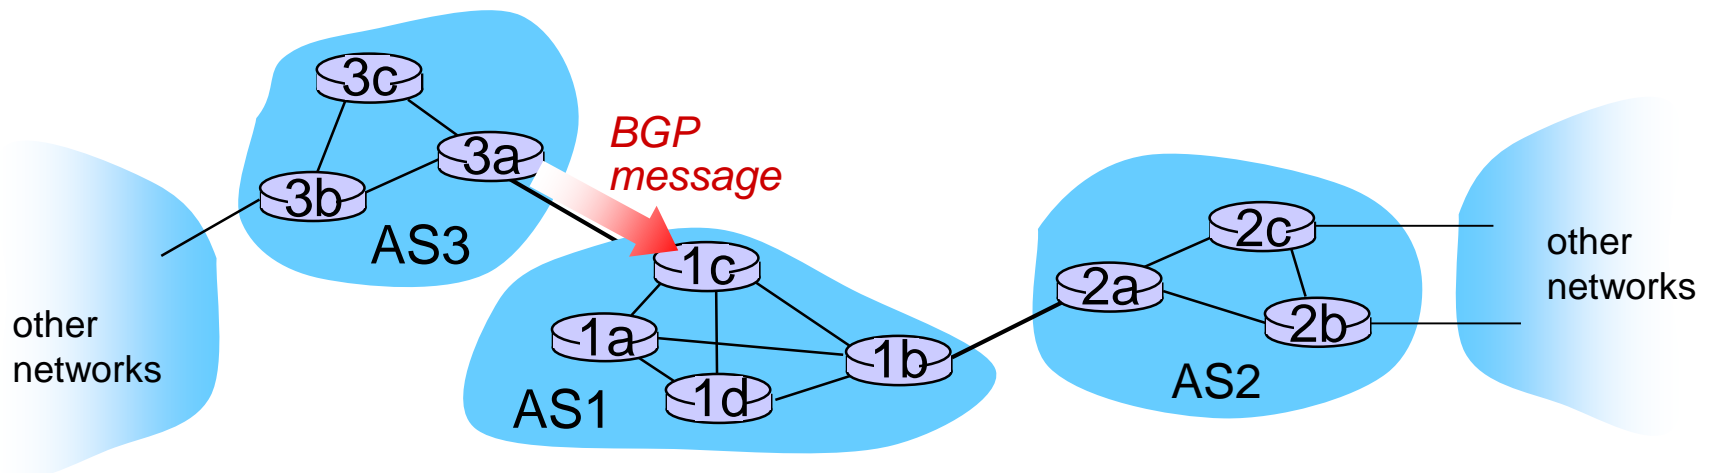

# BGP basics: distributing path information

- ❖ using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - 1c can then use iBGP to distribute new prefix info to all routers in AS1
  - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- ❖ when router learns of new prefix, it creates entry for prefix in its forwarding table.

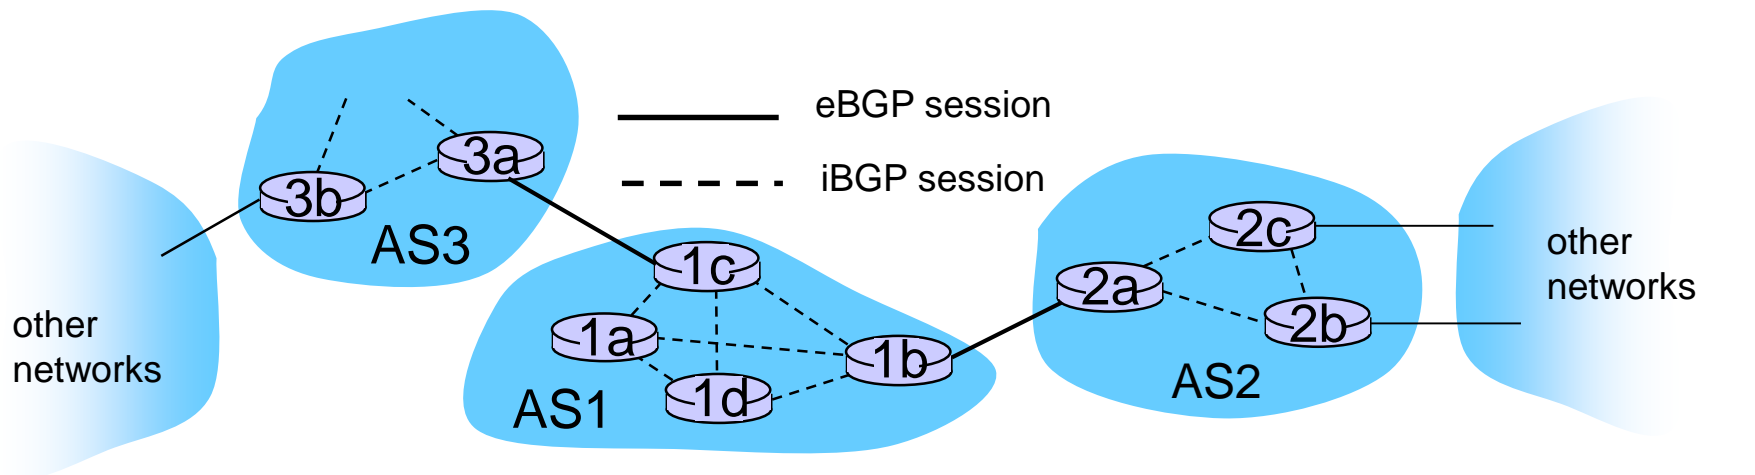

# BGP route selection

- ❖ router may learn about more than 1 route to destination AS, selects route based on:
  1. local preference value attribute: policy decision
  2. shortest AS-PATH
  3. closest NEXT-HOP router: hot potato routing
  4. additional criteria

# Path attributes and BGP routes

---



- ❖ advertised prefix includes BGP attributes
  - prefix + attributes = “route”
- ❖ two important attributes:
  - **AS-PATH**: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
  - **NEXT-HOP**: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- ❖ gateway router receiving route advertisement uses **import policy** to accept/decline
  - e.g., never route through AS x
  - *policy-based* routing

# BGP messages

- ❖ BGP messages exchanged between peers over TCP connection
- ❖ BGP messages:
  - **OPEN:** opens TCP connection to peer and authenticates sender
  - **UPDATE:** advertises new path (or withdraws old)
  - **KEEPALIVE:** keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - **NOTIFICATION:** reports errors in previous msg; also used to close connection




# BGP routing policy

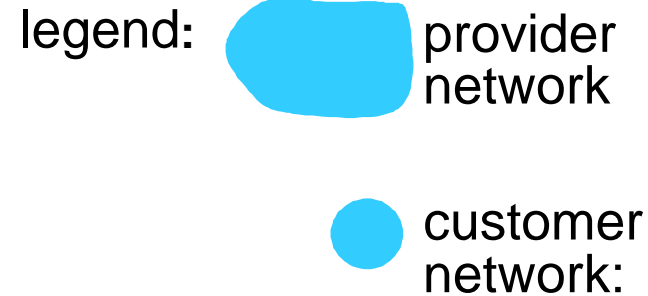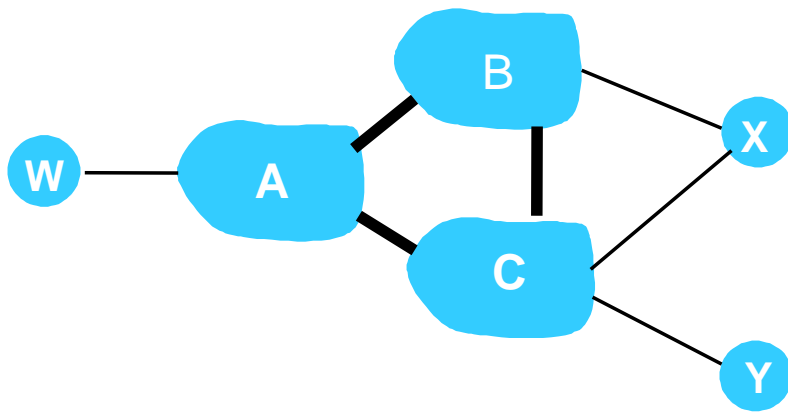

- ❖ A,B,C are *provider networks*
- ❖ X,W,Y are customer (of provider networks)
- ❖ X is *dual-homed*: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

# BGP routing policy (2)

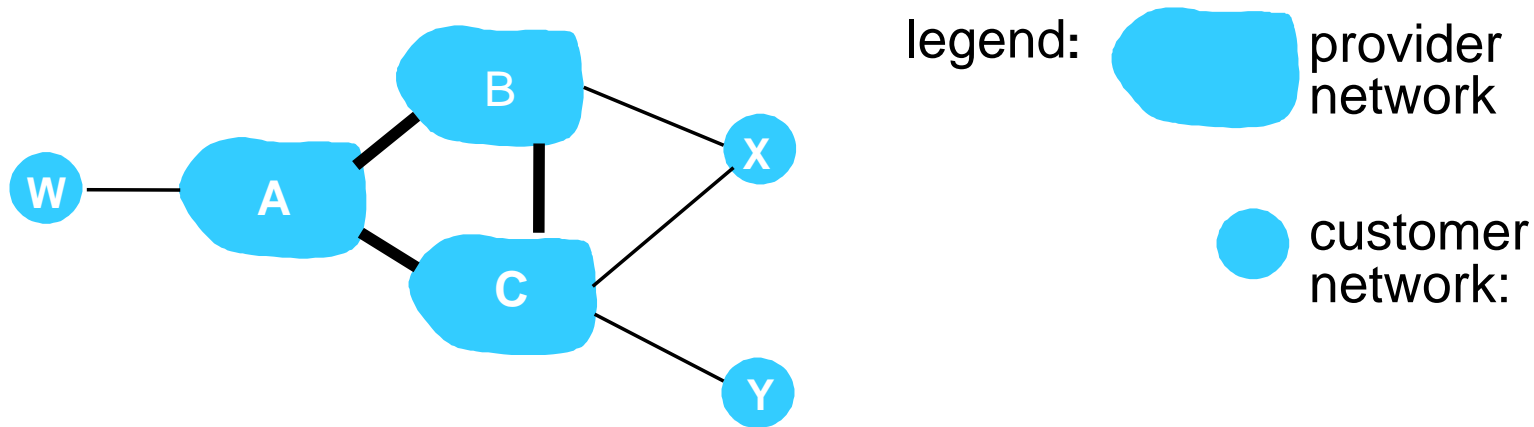

- ❖ A advertises path  $AW$  to B
- ❖ B advertises path  $BAW$  to X
- ❖ Should B advertise path  $BAW$  to C?
  - No way! B gets no “revenue” for routing  $CBAW$  since neither W nor C are B’s customers
  - B wants to force C to route to w via A
  - B wants to route *only* to/from its customers!

# Why different Intra-, Inter-AS routing ?

## *policy:*

- ❖ inter-AS: admin wants control over how its traffic routed, who routes through its net.
- ❖ intra-AS: single admin, so no policy decisions needed

## *scale:*

- ❖ hierarchical routing saves table size, reduced update traffic

## *performance:*

- ❖ intra-AS: can focus on performance
- ❖ inter-AS: policy may dominate over performance

# Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing


4.6 routing in the Internet

- RIP
- OSPF
- BGP

**4.7 broadcast and multicast routing**

# Broadcast routing

- ❖ deliver packets from source to all other nodes
- ❖ source duplication is inefficient:

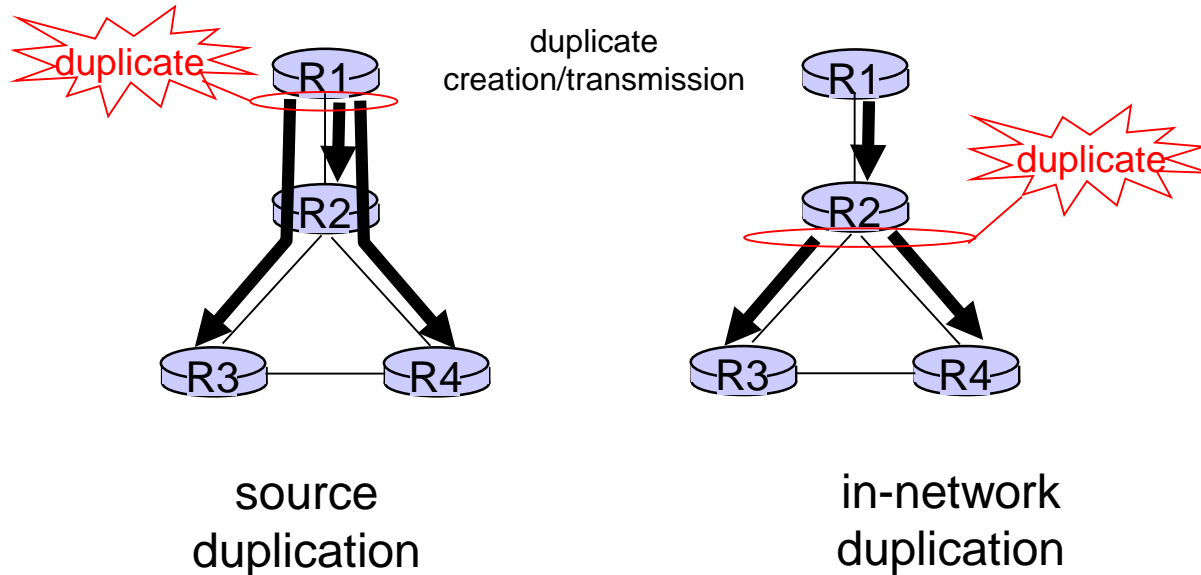


- ❖ source duplication: how does source determine recipient addresses?

# In-network duplication


- ❖ *flooding*: when node receives broadcast packet, sends copy to all neighbors
  - problems: cycles & broadcast storm
- ❖ *controlled flooding*: node only broadcasts pkt if it hasn't broadcast same packet before
  - node keeps track of packet ids already broadcasted
  - or reverse path forwarding (RPF): only forward packet if it arrived on shortest path between node and source
- ❖ *spanning tree*:
  - no redundant packets received by any node

# Spanning tree

- ❖ first construct a spanning tree
- ❖ nodes then forward/make copies only along spanning tree

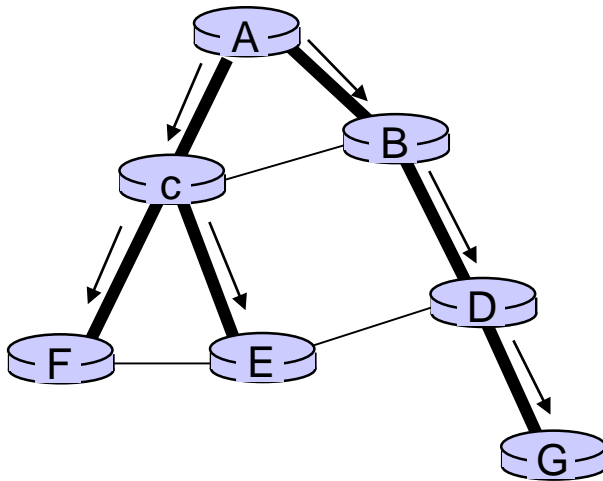


(a) broadcast initiated at A

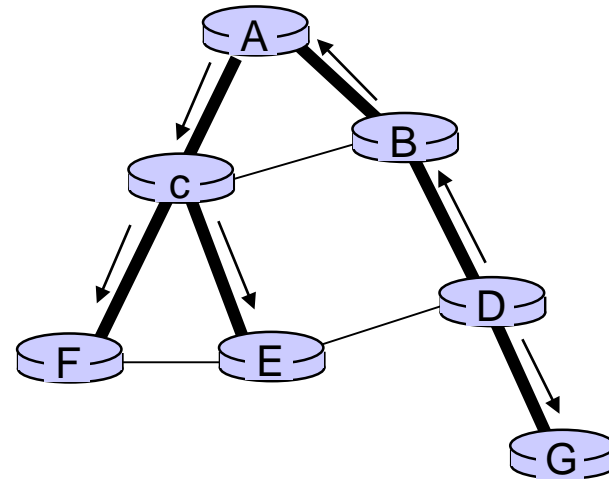


(b) broadcast initiated at D

# Spanning tree: creation

- ❖ center node
- ❖ each node sends unicast join message to center node
  - message forwarded until it arrives at a node already belonging to spanning tree

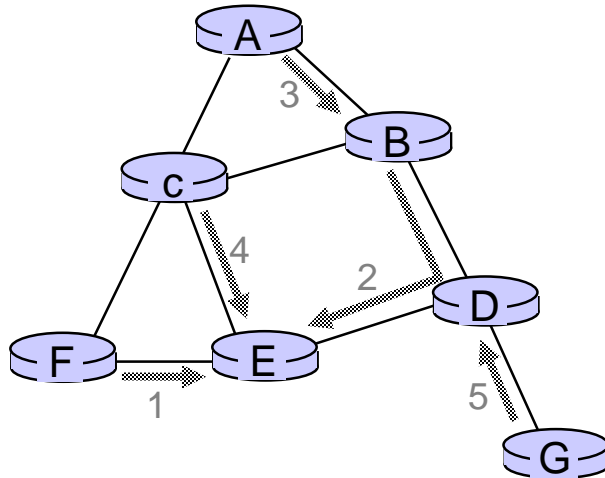

(a) stepwise construction of spanning tree (center: E)

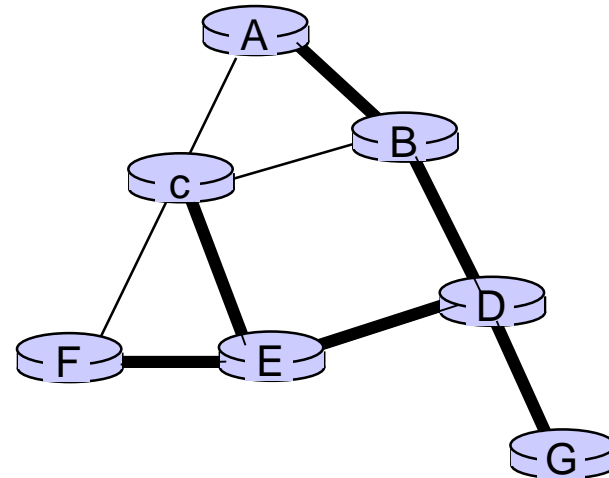

(b) constructed spanning tree



# Chapter 4: done!

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format, IPv4 addressing, ICMP, IPv6

4.5 routing algorithms

- link state, distance vector, hierarchical routing

4.6 routing in the Internet

- RIP, OSPF, BGP

4.7 broadcast and multicast routing

- ❖ understand principles behind network layer services:
  - network layer service models, forwarding versus routing  
how a router works, routing (path selection), broadcast, multicast

# Chapter 5: Link layer, LANs: outline

5.1 introduction, services

5.2 error detection,  
correction

5.3 multiple access  
protocols

5.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANs

5.5 link virtualization:  
MPLS

5.6 data center  
networking


5.7 a day in the life of a  
web request

# Link layer: introduction

## *terminology:*

- ❖ hosts and routers: **nodes**
- ❖ communication channels that connect adjacent nodes along communication path: **links**
  - wired links
  - wireless links
  - LANs
- ❖ layer-2 packet: **frame**, encapsulates datagram

*data-link layer* has responsibility of transferring datagram from one node to *physically adjacent* node over a link

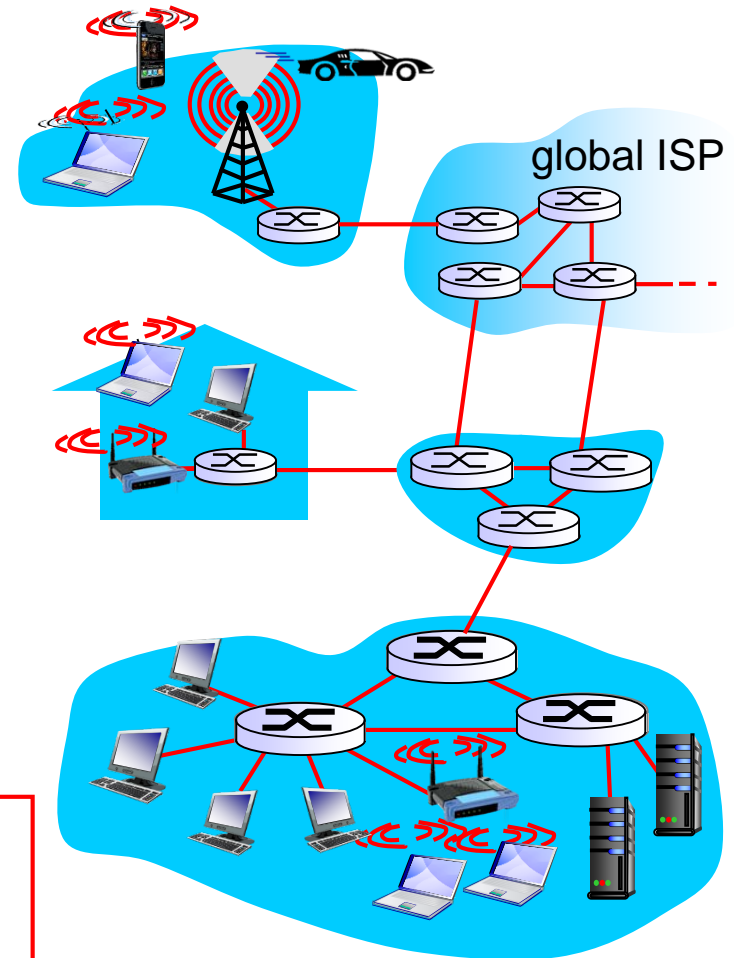

# Link layer: context

- ❖ datagram transferred by different link protocols over different links:
  - e.g., Ethernet on first link, frame relay on intermediate links, 802.11 on last link
- ❖ each link protocol provides different services
  - e.g., may or may not provide rdt over link

## *transportation analogy:*

- ❖ trip from Santa Cruz to Suzhou
  - limo: Santa Cruz to SFO
  - plane: SFO to PVG (Shanghai)
  - train: Shanghai to Suzhou
- ❖ tourist = **datagram**
- ❖ transport segment = **communication link**
- ❖ transportation mode = **link layer protocol**
- ❖ travel agent = **routing algorithm**

# Link layer services

## ❖ *framing, link access:*

- encapsulate datagram into frame, adding header, trailer
- channel access if shared medium
- “MAC” addresses used in frame headers to identify source, dest
  - different from IP address!

## ❖ *reliable delivery between adjacent nodes*

- we learned how to do this already (chapter 3)!
- seldom used on low bit-error link (fiber, some twisted pair)
- Used in wireless links: high error rates
  - **Q:** why both link-level and end-end reliability?
  - **A:** Reduce the frequency of end-end retrx

# Link layer services (more)

## ❖ *flow control:*

- pacing between adjacent sending and receiving nodes

## ❖ *error detection:*

- errors caused by signal attenuation, noise.
- receiver detects presence of errors:
  - signals sender for retransmission or drops frame

## ❖ *error correction:*


- receiver identifies *and corrects* bit error(s) without resorting to retransmission

## ❖ *half-duplex and full-duplex*


- with half duplex, nodes at both ends of link can transmit, but not at same time

# Where is the link layer implemented?

- ❖ in each and every host
- ❖ link layer implemented in “adaptor” (aka *network interface card* NIC) or on a chip
  - Ethernet card, 802.11 card; Ethernet chipset
  - implements link, physical layer
- ❖ attaches into host's system buses
- ❖ combination of hardware, software, firmware

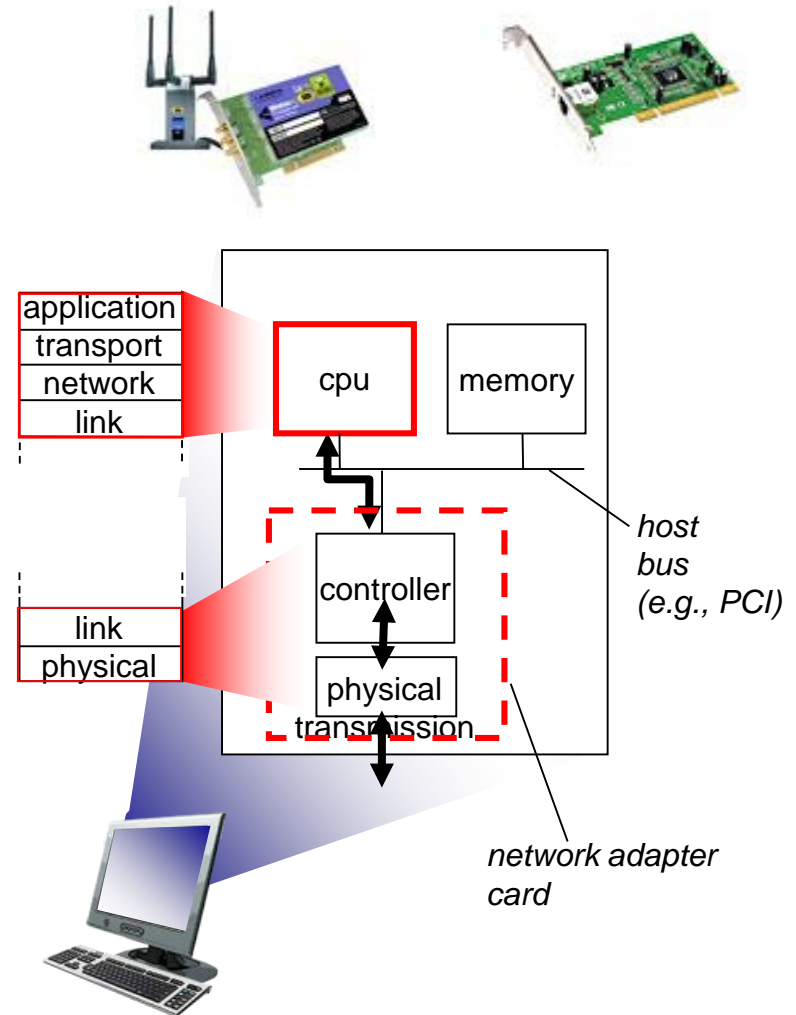

# Adaptors communicating

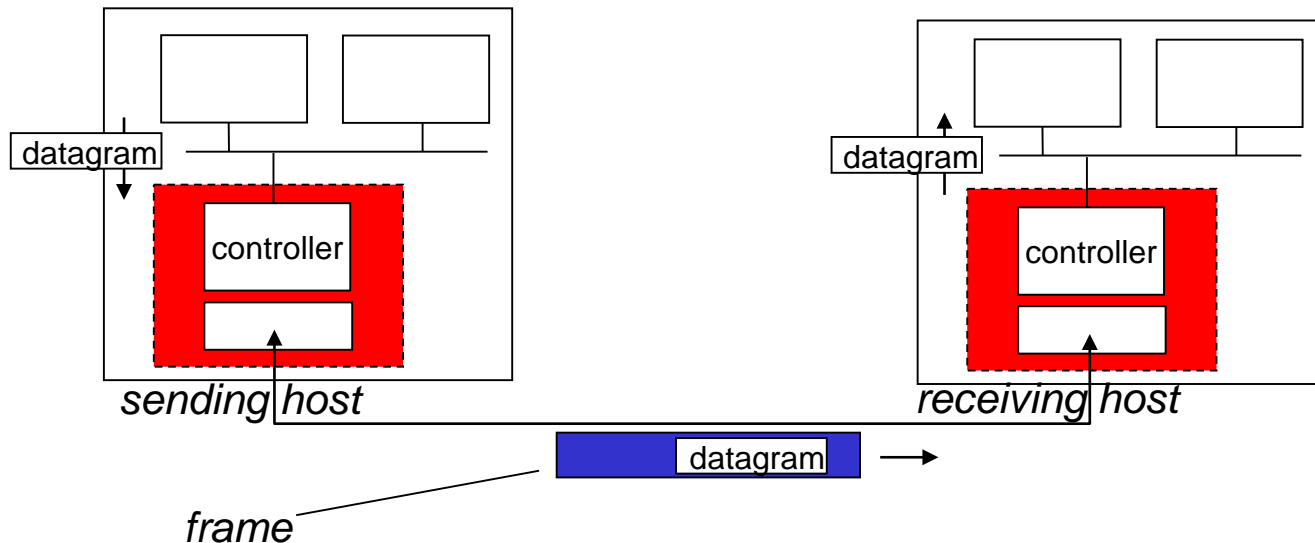

## ❖ sending side:

- encapsulates datagram in frame
- adds error checking bits, rdt, flow control, etc.

## ❖ receiving side

- looks for errors, rdt, flow control, etc
- extracts datagram, passes to upper layer at receiving side



# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection,  
correction

5.3 multiple access  
protocols

5.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANs

5.5 link virtualization:  
MPLS

5.6 data center  
networking


5.7 a day in the life of a  
web request

# Error detection

EDC= Error Detection and Correction bits (redundancy)

D = Data protected by error checking, may include header fields


- Error detection not 100% reliable!
  - protocol may miss some errors, but rarely
  - larger EDC field yields better detection and correction

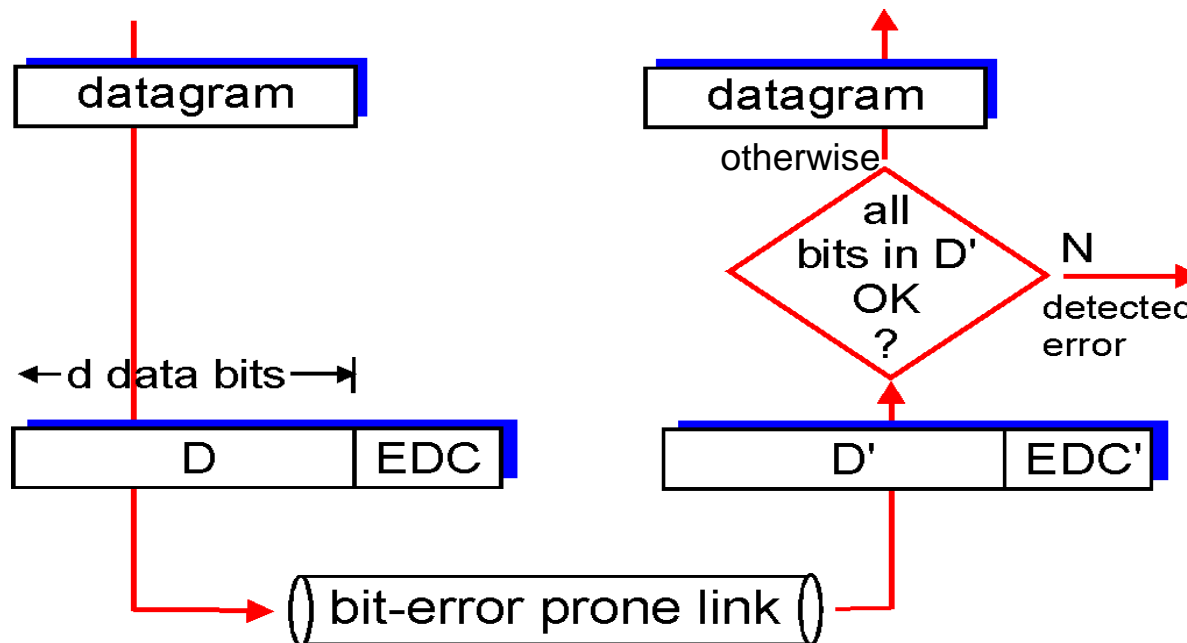

# Parity checking


## single bit parity:

- ❖ detect single bit errors

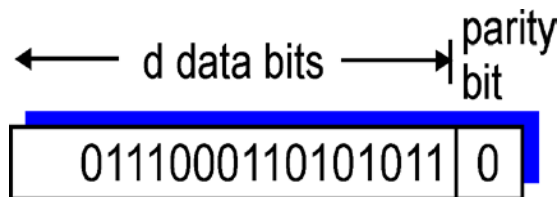

## two-dimensional bit parity:

- ❖ detect and correct single bit errors

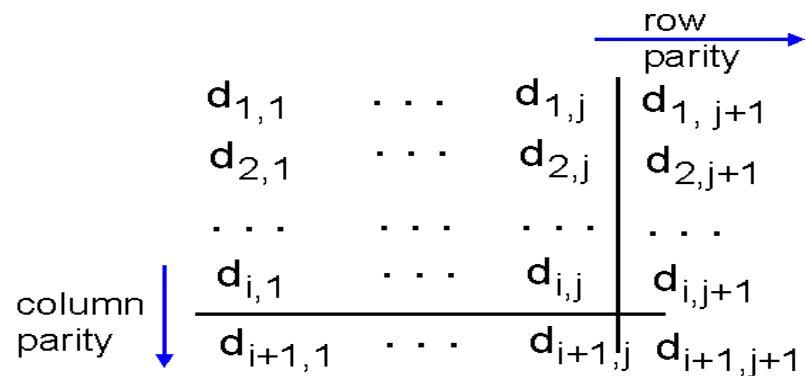

1	0	1	0	1	1
1	1	1	1	0	0
0	1	1	1	0	1
0	0	1	0	1	0

*no errors*

1	0	1	0	1	1
<del>1</del>	1	1	0	0	0
0	1	1	1	0	1
0	0	1	0	1	0

parity error

*correctable  
single bit error*

# Internet checksum (review)

*goal:* detect “errors” (e.g., flipped bits) in transmitted packet  
(note: used at transport layer *only*)

## *sender:*


- ❖ treat segment contents as sequence of 16-bit integers
- ❖ checksum: addition (1’s complement sum) of segment contents
- ❖ sender puts checksum value into UDP checksum field

## *receiver:*

- ❖ compute checksum of received segment
- ❖ check if computed checksum equals checksum field value:
  - NO - error detected
  - YES - no error detected.  
*But maybe errors nonetheless?*

# Cyclic redundancy check

- ❖ more powerful error-detection coding
- ❖ view data bits, **D**, as a binary number
- ❖ choose  $r+1$  bit pattern (generator), **G**
- ❖ goal: choose  $r$  CRC bits, **R**, such that
  - $\langle D, R \rangle$  exactly divisible by  $G$  (modulo 2)
  - receiver knows  $G$ , divides  $\langle D, R \rangle$  by  $G$ . If non-zero remainder: error detected!
  - can detect all burst errors less than  $r+1$  bits
- ❖ widely used in practice (Ethernet, 802.11 WiFi, ATM)

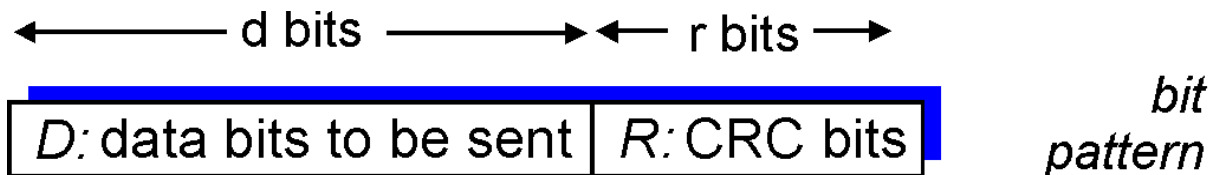

$$D * 2^r \text{ XOR } R$$

*mathematical formula*

# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection,  
correction

5.3 multiple access  
protocols

5.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANs

5.5 link virtualization:  
MPLS

5.6 data center  
networking

5.7 a day in the life of a  
web request

# Multiple access links, protocols

two types of “links”:

- ❖ point-to-point

- PPP for dial-up access
- point-to-point link between Ethernet switch, host

- ❖ *broadcast (shared wire or medium)*


- old-fashioned Ethernet
- upstream HFC
- 802.11 wireless LAN



shared wire (e.g.,  
cabled Ethernet)



shared RF  
(e.g., 802.11 WiFi)



shared RF  
(satellite)



humans at a  
cocktail party  
(shared air, acoustical)

# Next class

- ❖ Please read Chapter 5.3-5.4 of your textbook  
**BEFORE** Class